

### Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7100lm; 50W; 142lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour LiFePO4 maintained emergency batteries (670lm emergency lm output).


### Product Overview

<b>Product name</b>	RESISTO 1500 HE IP66 DALI 7100LM 840 EM
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Suspended, Wall surface mounted
<b>General application</b>	Logistics & Industry
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	7100
<b>Luminaire efficacy (lm/W)</b>	142
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	110
<b>Glare control</b>	< 22
<b>Photobiological Risk Group</b>	RG1
<b>Luminous flux (emergency) (lm)</b>	670

## RESISTO 1500 HE IP66 DALI 7100LM 840 EM 0010355

Total power consumption (W)	50
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103556
Warranty	5 years
Dimming method	N/A

### Photometry

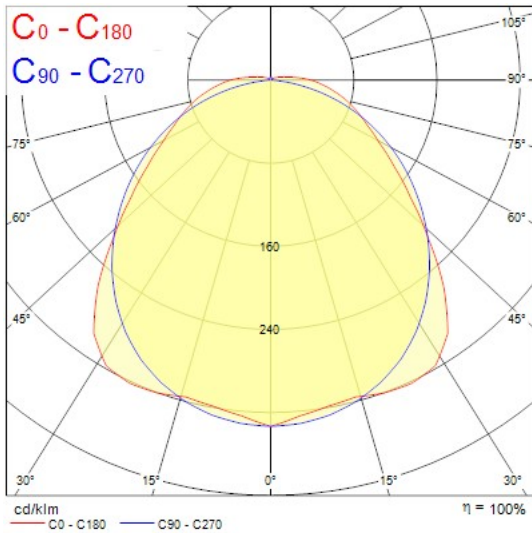

### Technical drawings

