



Harmony - Beveiligde sonde voor bewakings- en meetrelais

RM79696043

EAN Code: 3389110282047

Prijs: 21,75 EUR

Hoofd

range of product	Controlerelais harmony
product or component type	Controlesonde niveau
omschrijving toebehoren	Beschermde sonde op te hangen
bestemming toebehoren	Controlerelais Metingrelais
categorie toebehoren	Toebehoren relais
compatibiliteit product	RM4L RM35LM33MW

Complementair

materiaal	PUC beveiligingskap Roestvrij staal elektrode
net weight	0,15 kg

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2,400 cm
Package 1 Width	7,700 cm
Package 1 Length	2,400 cm
Package 1 Weight	78,000 g
Unit Type of Package 2	S01
Number of Units in Package 2	42
Package 2 Height	15,000 cm
Package 2 Width	15,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	3,514 kg

contractuele waarborg

Garantie	18 months
----------	-----------

De weergegeven prijs is de adviesprijs in euro excl. BTW. Deze kan onderhevig zijn aan korting. Neem contact op met uw lokale distributeur of detailhandel voor de daadwerkelijke prijs

Disclaimer: Deze documentatie is niet bedoeld als vervanging voor en mag niet worden gebruikt voor het bepalen van de geschiktheid of betrouwbaarheid van deze producten voor specifieke gebruikerstoepassingen



Environmental Data

Schneider Electric wil tegen 2050 de Net Zero-status hebben bereikt via partnerschappen in de toeleveringsketen, materialen met een lagere impact en circulariteit via onze doorlopende campagne "Use Better, Use Longer, Use Again" om de levensduur van producten en de recycleerbaarheid te verlengen.

[Uitleg van Environmental Data](#) >

[Hoe evalueren we de duurzaamheid van producten?](#) >

Use Better

Materialen en verpakking	
Pakket met gerecycleerd karton	Ja
Verpakkingen zonder kunststof	Ja
EU-richtlijn RoHS	Voldoet pro-actief (Product valt niet onder de EU RoHS juridische scope)

Use Again

Herverpakken en herfabriceren	
Terugname	No

Offer Marketing Illustration

Product benefits / Features

Features

Harmony Control Relay



Wide monitoring parameters (phase, current, voltage, liquid level, frequency, speed, temperature, and pump control) to meet your application needs.



Experience unprecedented accuracy, predictive maintenance, and superior security.



Compatible with a wide range of applications, such as hoisting, packaging, lifts, textile, pumping, and water.





True RMS measurement that minimizes the possibility of unexpected trips from highly polluted networks (except RM17TG and RM22TG)



Green Premium labelled products, promising compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ product

28 jul 2025

Life Is On | Schneider Electric

3

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Control Relay

Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.

Different product width to meet your needs:
17.5 mm/0.69 in.,
22.5 mm/0.88 in.,
35 mm/1.38 in.

Diagnostic button to check downstream circuit immediately, shorten the commission and troubleshooting time

A Dial-Pointer LED indicator that enhances ease of operation in difficult enviroments such as dusty or low-light conditions



Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Control Relay

Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.

Different product width to meet your needs:
17.5 mm/0.69 in.,
22.5 mm/0.88 in.,
35 mm/1.38 in.

Diagnostic button to check downstream circuit immediately, shorten the commission and troubleshooting time

A Dial-Pointer LED indicator that enhances ease of operation in difficult enviroments such as dusty or low-light conditions



The image shows two Schneider Harmony Control Relays side-by-side. The relay on the left is narrower (17.5 mm) and the one on the right is wider (22.5 mm). Both are dark grey with a lighter grey front panel. The front panel features a dial with a pointer and an LED indicator. The top of each relay has several terminals labeled A1, A2, M, E1, E2, E3. The bottom of the front panel has a diagnostic button. Green arrows point from the text callouts to the specific features on the relays.

Offer Marketing Illustration

Product benefits / Features

Features

Harmony Control Relay



Wide monitoring parameters (phase, current, voltage, liquid level, frequency, speed, temperature, and pump control) to meet your application needs.



Experience unprecedented accuracy, predictive maintenance, and superior security.



Compatible with a wide range of applications, such as hoisting, packaging, lifts, textile, pumping, and water.





True RMS measurement that minimizes the possibility of unexpected trips from highly polluted networks (except RM17TG and RM22TG)



Green Premium labelled products, promising compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ product

6

Life Is On | Schneider Electric

28 jul 2025

Image of product / Alternate images

Alternative



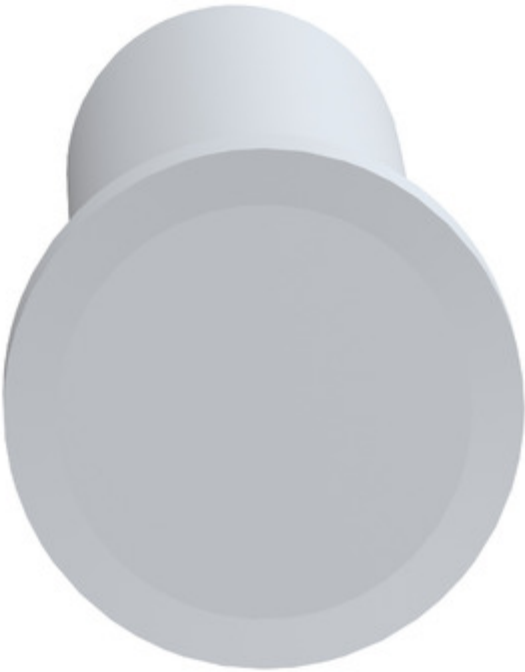




Image of product in real life situation

