


Optix Recessed 600x600 Standard Output  
*OPTIX RECESSED 600x600 3L SO 4000K ALU*  
2023632

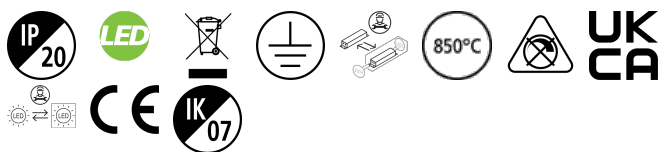


PRODUCT OVERVIEW

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | OPTIX RECESSED 600x600 3L SO 4000K ALU |
| Technology                      | LED (3 SDCM)                           |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling recessed mounting              |
| Fixture rating                  | Enclosed                               |
| Warranty                        | 5 years                                |
| Fixture luminous flux (lm)      | 2900                                   |
| Luminaire efficacy (lm/W)       | 138                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | SDCM3                                  |
| Glare control                   | < 16                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 21                                     |
| Electrical protection           | Class I                                |
| Control gear type               | LED driver constant current            |
| LED Flickering Rate             | Ultra low (5% or less)                 |
| Housing colour                  | RAL 9016 - Traffic white / Bezel       |
| IP rating                       | IP20                                   |
| IK rating                       | IK07                                   |
| Product EAN number              | 5025768236329                          |

PHOTOMETRY

Optix Recessed 600x600 Standard Output  
OPTIX RECESSED 600x600 3L SO 4000K ALU  
2023632

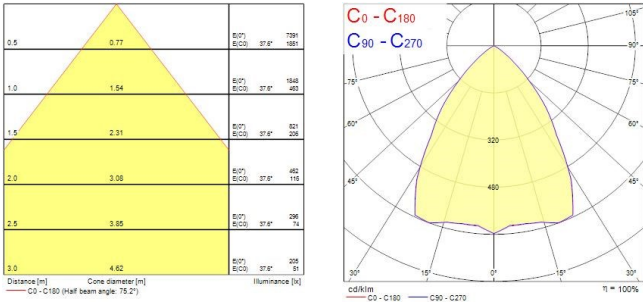

TECHNICAL DRAWINGS

