


## VVSK-T26M26: T-piece for supply for manifold Ø26

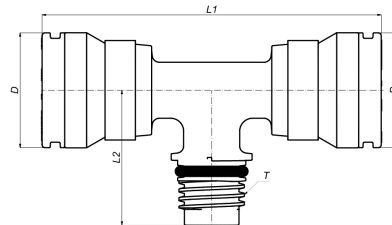

### Commercial information

Synthetic T-piece for manifold, male, with 2x SK connectors

#### Certificates

QB (CSTBat), ETA, KIWA, ÖVGW Wasser, SINTEF, SITAC, KOMO, STF, GOST-R, TSU, EMI

#### Applications

Potable water, Heating, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

|                                      |                                                |                                  |                        |
|--------------------------------------|------------------------------------------------|----------------------------------|------------------------|
| Material connection 1                | Polyvinylidene fluoride (PVDF)                 | Angle                            | 90 Degrees             |
| Surface protection connection 1      | Untreated                                      | Outer pipe diameter connection 1 | 26 Millimetre          |
| Surface treatment connection 1       | Untreated                                      | Outer pipe diameter connection 3 | 26 Millimetre          |
| Material connection 2                | Polyvinylidene fluoride (PVDF)                 | Wrench width                     | 0 Millimetre           |
| Surface protection connection 2      | Untreated                                      | Max. operating pressure at 20 °C | 10 Bar                 |
| Surface treatment connection 2       | Untreated                                      | Wrench width union nut           | 0 Millimetre           |
| Material connection 3                | Polyvinylidene fluoride (PVDF)                 | Medium temperature (continuous)  | -10 70 Degrees celsius |
| Surface treatment connection 3       | Untreated                                      | Standard Dimension Ratio (SDR)   | 0                      |
| Model                                | T-piece                                        |                                  |                        |
| Swept entry type (with inner radius) | ✗                                              |                                  |                        |
| Reducing                             | ✗                                              |                                  |                        |
| System specific                      | ✓                                              |                                  |                        |
| Connection 1                         | Insert (push-fitting)                          |                                  |                        |
| Contour code connection 1            | Other                                          |                                  |                        |
| Connection 2                         | Internal thread cylindrical BSPP-G (ISO 228-1) |                                  |                        |
| Contour code connection 2            | Other                                          |                                  |                        |
| Connection 3                         | Insert (push-fitting)                          |                                  |                        |
| Contour code connection 3            | Other                                          |                                  |                        |
| Flange standard                      | Other                                          |                                  |                        |
| Material sealing                     | Ethylene-propylene diene monomer rubber (EPDM) |                                  |                        |
| Main colour fitting                  | White                                          |                                  |                        |
| High tensile strength                | ✗                                              |                                  |                        |
| Ring stiffness class                 | Other                                          |                                  |                        |
| With sealing rings/gaskets           | ✓                                              |                                  |                        |
| With drain valve                     | ✗                                              |                                  |                        |
| With de-aerator                      | ✗                                              |                                  |                        |
| With thermal insulation              | ✗                                              |                                  |                        |
| With buffer stud                     | ✗                                              |                                  |                        |
| Capped                               | ✗                                              |                                  |                        |
| FM quality mark                      | ✗                                              |                                  |                        |
| LPCB quality mark                    | ✗                                              |                                  |                        |
| ULC quality mark                     | ✗                                              |                                  |                        |
| UL quality mark                      | ✗                                              |                                  |                        |
| DIN-CERTCO certificate               | ✗                                              |                                  |                        |
| VdS quality mark                     | ✗                                              |                                  |                        |
| With approval for TÜV                | ✗                                              |                                  |                        |
| DVGW quality mark for gas            | ✗                                              |                                  |                        |
| DVGW quality mark for water          | ✓                                              |                                  |                        |
| KIWA certified                       | ✓                                              |                                  |                        |
| Gastec QA mark                       | ✗                                              |                                  |                        |
| KOMO certified                       | ✓                                              |                                  |                        |
| Type approval according to BBR/EKS   | ✗                                              |                                  |                        |

## Related products