


Optix Recessed 600x600 Medium Output
OPTIX RECESSED 600x600 3L TW ALU DALI
2023636

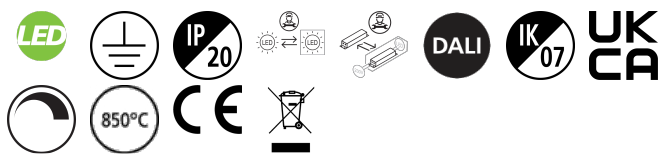


PRODUCT OVERVIEW

Product name	OPTIX RECESSED 600x600 3L TW ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	113
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236367

PHOTOMETRY

Optix Recessed 600x600 Medium Output
OPTIX RECESSED 600x600 3L TW ALU DALI
2023636



0.5	0.75 0.75	E(0°) E(90°) E(180°)	2569 2099 2117
1.0	1.56 1.56	E(0°) E(90°) E(180°)	2137 525 529
1.5	2.34 2.34	E(0°) E(90°) E(180°)	950 223 235
2.0	3.13 3.13	E(0°) E(90°) E(180°)	654 151 155
2.5	3.91 3.91	E(0°) E(90°) E(180°)	342 64 66
3.0	4.69 4.67	E(0°) E(90°) E(180°)	237 50 52

Distance [m] Cone diameter [m] Illuminance [lx]
—— C0 - C180 (Half beam angle: 75.9°)
—— C90 - C270 (Half beam angle: 76.0°)

TECHNICAL DRAWINGS

