

Concord

OPTIX RECESSED 600x600 3L TW ALU DALI

2023636



Features

- OPTIX RECESSED 600x600 3L TW ALU DALI is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 3 lines configuration. White RAL9016 fixture body. DALI DT8 controlled tunable white light engine, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 30W. Luminaire efficacy 113lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

Product Overview

| | |
|--|---------------------------------------|
| Product name | OPTIX RECESSED 600x600 3L TW ALU DALI |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| Fixture rating | Enclosed |
| Fixture luminous flux (lm) | 3400 |
| Luminaire efficacy (lm/W) | 113 |
| Light colour | Tunable White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 16 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 30 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |

Concord
by SYLVANIA

Concord

OPTIX RECESSED 600x600 3L TW ALU DALI

2023636

IK rating

IK07


Product EAN number

5025768236367

Warranty

5 years

Photometry

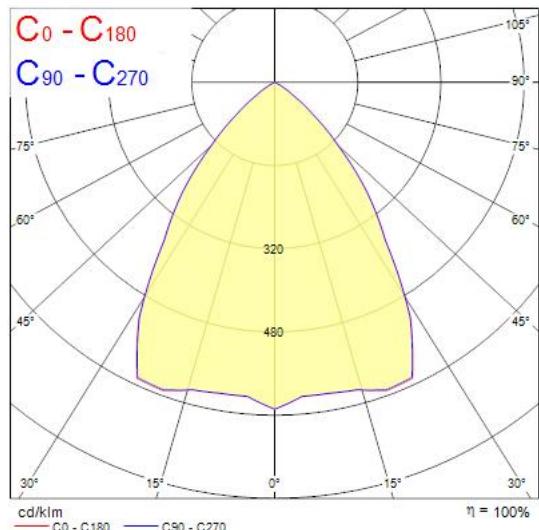

Technical drawings

