


Optix Recessed 1200x300
OPTIX RECESSED 1200X300 1L 3000K ALU DALI
2023655

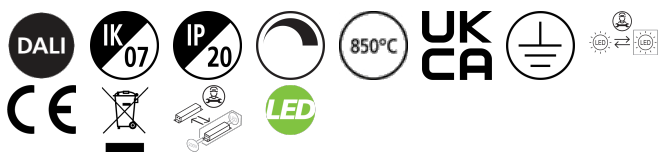


PRODUCT OVERVIEW

Product name	OPTIX RECESSED 1200X300 1L 3000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	123
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236558

PHOTOMETRY

Optix Recessed 1200x300
OPTIX RECESSED 1200X300 1L 3000K ALU DALI
2023655



Distance (m)	Cone diameter (m)	Beam angle (°)	Beam angle (°)	Beam angle (°)
0.5	0.76	5.0°	37.4°	3196
	0.76	5.0°	37.4°	2037
	0.76	5.0°	37.4°	2037
1.0	1.53	5.0°	37.4°	2039
	1.53	5.0°	37.4°	521
	1.53	5.0°	37.4°	521
1.5	2.29	5.0°	37.4°	911
	2.29	5.0°	37.4°	221
	2.29	5.0°	37.4°	221
2.0	3.06	5.0°	37.4°	612
	3.06	5.0°	37.4°	150
	3.06	5.0°	37.4°	150
2.5	3.82	5.0°	37.4°	328
	3.82	5.0°	37.4°	83
	3.82	5.0°	37.4°	83
3.0	4.59	5.0°	37.4°	228
	4.59	5.0°	37.4°	58
	4.59	5.0°	37.4°	58

TECHNICAL DRAWINGS

