



Features

- Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, with medium optics provide homogenous light distribution for aisles and focus areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 57W power consumption, 8800lm luminous flux, 154 lm/W efficacy, 3380 mm x62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.


Product Overview

Product name	ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03


ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
0042556

Product EAN number	5410288425566
Warranty	5 years
Colour Code	840

Photometry

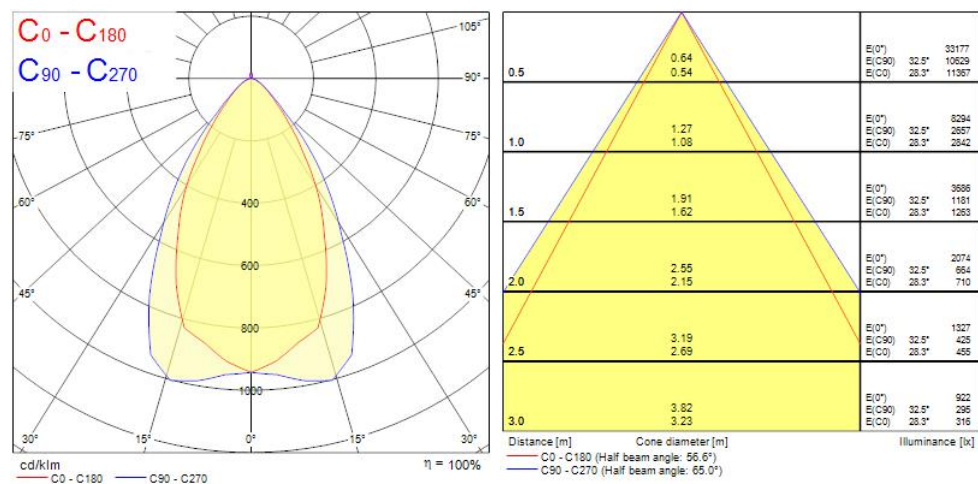

Technical drawings

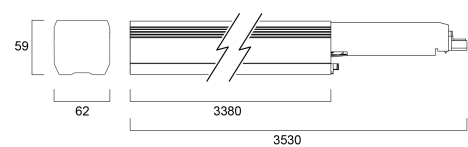

Data table

GENERAL DATA

Product name	ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
Technology	LED
Cap/Base	N/A

ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK 0042556

Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Operating temperature range (°C)	0°C...+35°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 20
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	57
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	250
Inrush Current (A)	25
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	27
Max. products per 20A B Breaker	35

ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK 0042556

Connectable conductor cross section - Min (mm ²)	0.5
--	-----

Connectable conductor cross section - Max (mm ²)	4
--	---

LIFETIME DATA

Lifespan L70 B50	60000
------------------	-------

Lifespan L80 B10	60000
------------------	-------

Lifespan L90 B10	31500
------------------	-------

PHYSICAL DATA

Housing colour	RAL9016
----------------	---------

IP rating	IP20
-----------	------

IK rating	IK03
-----------	------

IK rating of sensor	IK03
---------------------	------

Diffuser finish	Transparent
-----------------	-------------

Diffuser material	PMMA Acrylic
-------------------	--------------

Nominal Product Length (mm)	3380
-----------------------------	------

Nominal Product Width (mm)	62
----------------------------	----

Weight (kg)	5.0
-------------	-----

PACKAGING

Single packaging type	Mix(80% carton, 20% plastic)
-----------------------	------------------------------

Product EAN number	5410288425566
--------------------	---------------

Packaging single width (cm)	6.5
-----------------------------	-----

Packaging single depth (cm)	5.8
-----------------------------	-----

DUN14 (outer)	05410288425566
---------------	----------------

Packaging outer length / height (cm)	353.0
--------------------------------------	-------

SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----

SYLVANIA

ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
0042556

Light your world