

Product data sheet Spirotech

Product name

SpiroVent RV2 -3/4" -Uni

Product properties

Article number

UA075W


Product image

A brass (microbubble) deaerator with a 22 mm - 2" universal connection

- Removes all circulating air and micro bubbles effectively
- Removes trapped air when installed at the correct location
- Greatly reduces the need for manual venting
- Applicable with 50/50 Glycol / Water (Volume)
- Constant low-pressure drop
- No unnecessary shutdown
- Connection diameters from 22 mm to 2" (G2)
- Exceptional guarantee



Product dimensions

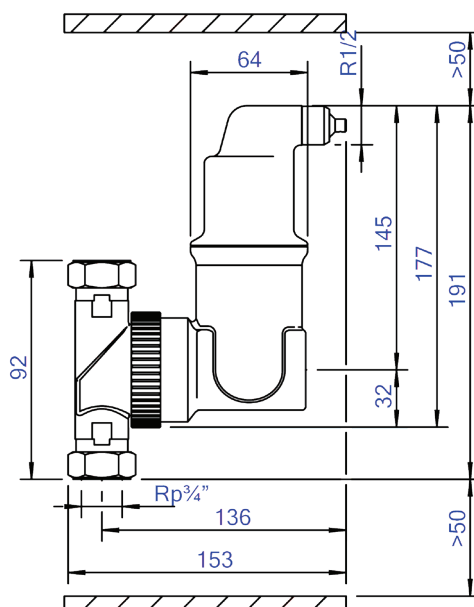

Product data sheet Spirotech

ETIM product data

Housing material	Brass	Article compression class	PN 10
With drain valve	No	Surface protection	Untreated
Housing material quality	Other	Suitable for open system	No
Backwash filter	No	Suitable for closed system	Yes
Max. operating pressure	10 bar	Suitable for solar	No
Variable flow direction	Yes	With dismountable filter	No
With insulation	No	Filter volume	0.38 l
Separator type	Air	Magnet operating principle	No
Connection	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)	With automatic de-aerator	Yes
Model	Horizontal/vertical	With integrated replenishment automat	No
Nominal diameter	3/4 inch (20)	With couplers	No
Max. glycol mixture	50 %	Material of connection	Brass
Suitable for heating	Yes	Inlet/outlet offset distance	0 mm
Suitable for cooling	Yes	Material quality connection	Other
Construction length	195 mm	Operating principle	Other

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

