


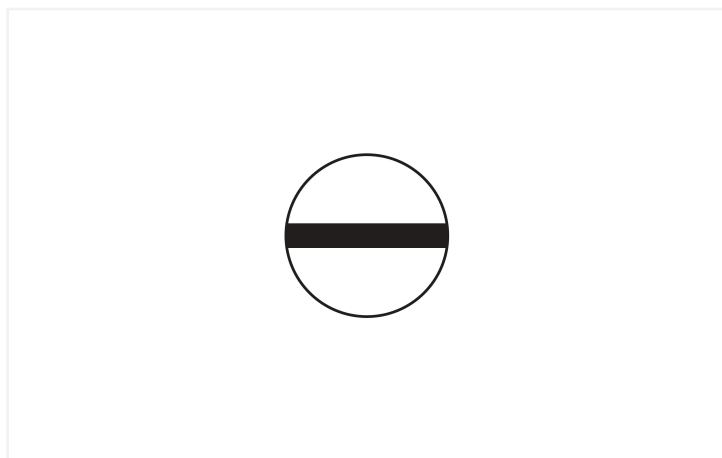


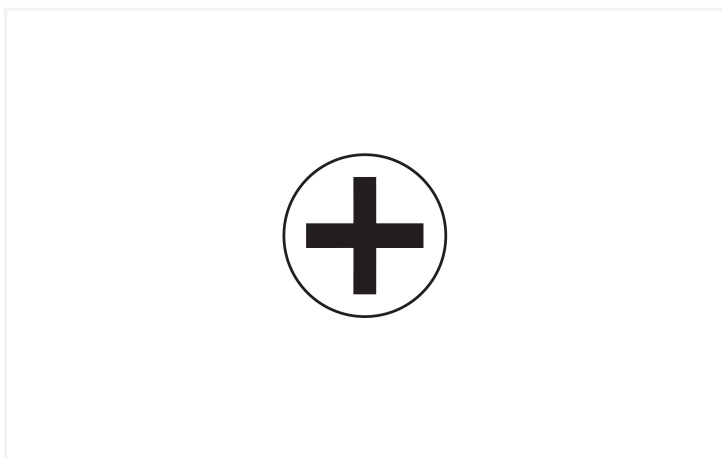

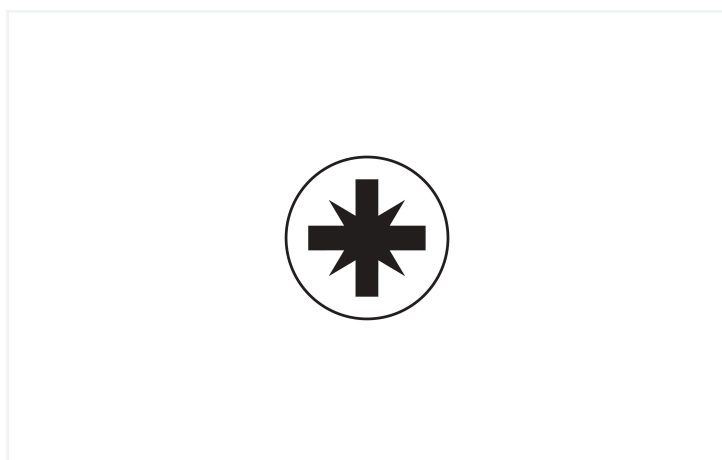

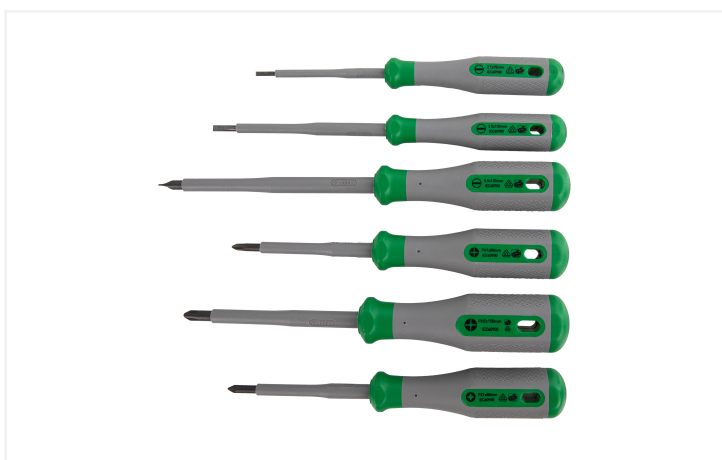

**Data Sheet | Item Number: 206-2101**

VDE screwdriver set; PH1; PH2; PZ1; 2.5; 3.5; 5.5; VDE tested; 1000 V; insulated; 2-component grip

<https://www.wago.com/206-2101>



## This item includes:

 <b>Item No.: 206-2111</b> 1 VDE slot screwdriver; 2.5 x 0.4 x 75; VDE tested; 1000 V; insulated; 2-component grip; size 1 (100 mm); green/gray	 <b>Item No.: 206-2113</b> 1 VDE slot screwdriver; 3.5 x 0.6 x 100; VDE tested; 1000 V; insulated; 2-component grip; size 1 (100 mm); green/gray	 <b>Item No.: 206-2115</b> 1 VDE slot screwdriver; 5.5 x 1.0 x 125; VDE tested; 1000 V; insulated; 2-component grip; size 2 (110 mm); green/gray	 <b>Item No.: 206-2121</b> 1 VDE crosshead screwdriver; PH1 x 80; VDE tested; 1000 V; insulated; 2-component grip; size 2 (110 mm); green/gray
 <b>Item No.: 206-2122</b> 1 VDE crosshead screwdriver; PH2 x 100; VDE tested; 1000 V; insulated; 2-component grip; size 3 (115 mm); green/gray	 <b>Item No.: 206-2131</b> 1 VDE crosshead screwdriver; PZ1 x 80; VDE tested; 1000 V; insulated; 2-component grip; size 2 (110 mm); green/gray		

## Notes

## Safety Information

- Always use the appropriate VDE screwdriver variant for your screw head variant to prevent injury from slipping and damage to the VDE screwdriver or screw head.
- Keep the VDE screwdriver free from oil, grease and moisture to prevent slipping and potential injury.
- If the tip is damaged, replace the VDE screwdriver to prevent slipping and injury.
- Do not use the VDE screwdriver if the handle or insulation is damaged to prevent the risk of electric shock.
- Do not use the VDE screwdriver to open the contact spring on products with operating slots.
- Do not use the VDE screwdriver as a prying tool or chisel.
- Wear approved eye protection and the necessary personal protective equipment for your application.
- Environmental and storage information: Ensure that VDE screwdrivers are not exposed to strong heat sources (e.g., heating pipes or steam lines) or to UV radiation.

## Safety information 2

1. Work on live or load-carrying parts may only be performed by properly trained and qualified personnel.
2. Use only for its intended purpose!
3. Observe national regulations, standards and guidelines!
4. Follow the technical specifications of the products!
5. Do not use soiled components!
6. Use only compatible bits and drives!

## Mechanical data

Tip type	PH1; PH2; PZ1; 2.5 x 0.4; 3.5 x 0.6; 5.5 x 1.0
Continuous blade	No
Blade type	Straight
Roll-away protection	Yes
Hanging eyelet	Yes
Grip marking	Yes
Head marking	Yes

## Material data

Material 1	Polypropylen (PP)
Material 2	Thermoplastische Elastomere (TPE)
Fire load	0 MJ
Blade surface	Burnished
Weight	425 g

**Commercial data**

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966612585
Customs tariff number	8205400000

**Product Classification**

UNSPSC	27111701
ETIM 9.0	EC011815
ETIM 10.0	EC011815
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads**

**Environmental Product Compliance**

**Compliance Search**

Environmental Product Compliance 206-2101	
---	--