




Motion detector, Niko Home Control, 13 m, 180°, IP54, with orientable lens, for surface mounting, anthracite

550-20201



- 
 Niko Home Control
- 
 master/secondary
- 
 IP54
- 
 180°
- 
 13 m from a height of 3 m
- 
 2 m – 3 m
- 
 surface-mounting




This motion detector is suitable for outdoor use, for example, along the driveway, on the terrace or in the garden. It is also equipped with a built-in light sensor. You aim the motion detector wherever you wish and partition the detection area using a cover mask. The Niko Home Control system supplies power to the device.

Colour: anthracite

Compatible secondary detectors: 550-20201

Compatible master detectors:

Detection range

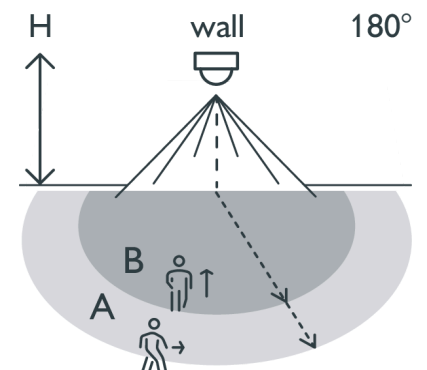

H	A Across	B Towards
2 m	8 m	4 m
2.5 m	11 m	5.5 m
3 m	13 m	6.5 m

Technical features

Compatible secondary detectors	550-20201
Configuration	master/secondary
Input voltage	26 Vdc
Detector output	26V
Switch-off delay	8 sec – 1,800 sec
Detection angle	180 °
Detection range (PIR)	13 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+45 °C
Mounting method	surface mounting
Mounting height	2 m – 3 m
Colour	anthracite
Dimensions visible (HxWxD)	70 mm x 90 mm
Dimensions (HxWxD)	70 mm x 90 mm x 130 mm
Protection degree standalone	IP54

Dimensions

