


Twofold faceplate with 71 mm centre distance, Niko Pure alu ganache brushed

222-76800

4 year
warranty

Twofold faceplate with 71 mm centre distance from the range Niko Pure. Niko Pure alu ganache brushed

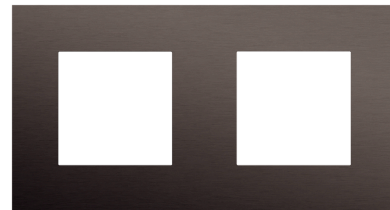

Technical data

Twofold faceplate with 71 mm centre distance, Niko Pure alu ganache brushed.

- Number of spaces for mechanisms: 2
- Colour faceplate: alu ganache brushed
- Colour RAL (approximately): 050 30 10
- Colour NCS (approximately): NCS S 8005-Y50R
- Recommended colour central plate: dark brown coated
- Frame composition: It consists of an upper frame and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of aluminium. The lower frame is made of anthracite polycarbonate (PC) + acrylic-styrene-acrylate (ASA).
- Surface treatment: anodised and brushed. The anodisation process may result in slight colour differences
- Surface finishing: matt
- Coating upper frame: enamelled ganache
- Coating lower frame: enamelled dark brown
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Surface-mounting height: max. 8.5 mm
- Fire safety:
 - self-extinguishing: complies with a filament test of 650°C
- Halogen-free: no
- Centre-to-centre distance: 71 mm
- Minimum ambient temperature: -5 °C
- Maximum ambient temperature: 40 °C
- Protection degree: IP41 for the combination of a mechanism, central plate and faceplate
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 8.9 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm