

# FX Extra High Range

for supporting heat pumps, condensers, pipe and cable trays



100% UK Manufacture




The New FX Extra High range has been designed to support your Air Conditioning and Heat Recovery units at least 150mm off surface level, without the need of buying a full framework solution.

The FX 500 High & FX 600 High are moulded as a complete unit. For ease of manoeuvrability, the FX 1metre High has been designed as Step Blocks, that conform in shape to our standard FX 1m

The feet have a 41mm x 21mm Pre Galvanised channel recessed into the top face allowing you to use standard strut fixings to secure your services to the feet.

The range of products are made of durable recycled rubber, which offers built-in anti-vibration and makes it both economical and environmentally friendly.

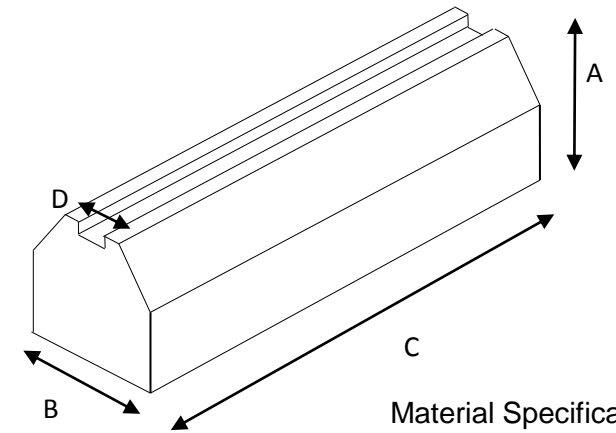

## Material Specification

SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer. BS7188:1989 & BS5696 Part 3:1979

## WORKING CONDITIONS

Suitable for internal or external applications in temperatures between -40°C to +80°C

Product Code	Model	Height (mm)	Width (mm)	Length (mm)	Max. Loading per foot (kg)	FX Weight (kg)
		A	B	C		
COMBI 10	FX 500 High	150	160	530	400	9
COMBI 12	FX 600 High	200	230	610	450	17
COMBI 41	FX 1m High	200	180	1000	645	25.75