
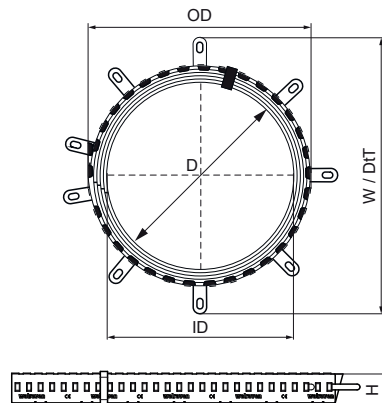


## Walraven Pacifyre® BFC

(U0438)

Basic fire collar for plastic and multi-layer pipes



### Features & benefits

- Easy to install
- Suitable for damp conditions
- Oversized for increased flexibility in positioning
- Up to 2 hours fire protection in wall penetrations
- Up to 4 hours fire protection on floor penetrations
- Low height increases installation flexibility
- For thin- and thick-walled pipes
- For flexible walls, solid walls and floors
- With a fire resistance up to EI 120 U/U
- Tested and approved according to EN 1366-3



| Product Number   | Outside<br>Pipe<br>Diameter | Inner<br>Diameter | Outer<br>Diameter | Total<br>Height | Total<br>Width | Total<br>Depth | Number<br>Of Fixations<br>Needed |
|------------------|-----------------------------|-------------------|-------------------|-----------------|----------------|----------------|----------------------------------|
| Reference Letter | D                           | ID                | OD                | H               | W              | DtT            |                                  |
| Unit description | mm                          | mm                | mm                | mm              | mm             | mm             |                                  |
| 2133000050       | 0 - 50                      | 56                | 70                | 44              | 31             | 267            | 2                                |
| 2133000063       | 51 - 63                     | 67                | 90                | 44              | 33             | 313            | 3                                |
| 2133000075       | 64 - 75                     | 80                | 100               | 44              | 33             | 345            | 3                                |
| 2133000090       | 76 - 90                     | 98                | 125               | 44              | 35             | 423            | 3                                |
| 2133000110       | 91 - 110                    | 118               | 150               | 58              | 35             | 487            | 3                                |
| 2133000125       | 111 - 125                   | 130               | 160               | 44              | 37             | 533            | 4                                |
| 2133000140       | 126 - 140                   | 145               | 180               | 44              | 39             | 595            | 4                                |
| 2133000160       | 141 - 160                   | 165               | 200               | 44              | 39             | 659            | 4                                |