

136-335 18W specific configuration

Adj. downl | white | Ø180mm | 45° | 3000K | 18~30W | EU plug

Introduction

Purpose of this Document

This document provides information for 136-335 18W. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	17.4 W
Correlated Colour Temperature	3137 K
Total lumen output	1953 lm
Efficiency	112 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	233 V
RMS Input current feed. I_{RMS}	0.086 A
Total input power	17.4 W

Frequency of input power	50 Hz
Power factor	0.87
Displacement power factor	0.89

Total harmonic distortion of the current	16.9%
Total harmonic distortion of the voltage	2.51%

Input Power Curve

Voltage - Current

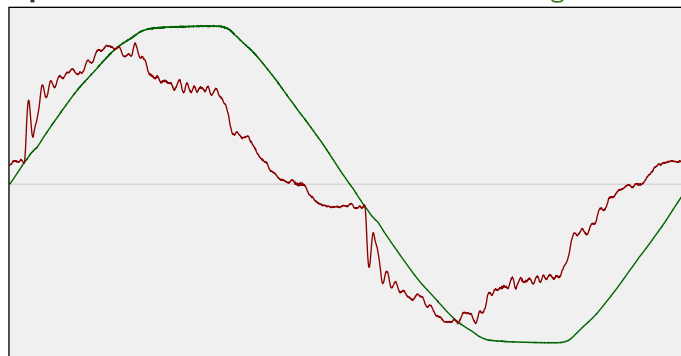

Efficiency


Radiated power efficiency: 34.4%

Lumen efficiency: 112 lm/W

Harmonics

3rd Harmonic	11.2%
5th Harmonic	9.47%
7th Harmonic	2.49%
9th Harmonic	5.5%
11th Harmonic	2.4%

Current Harmonics %

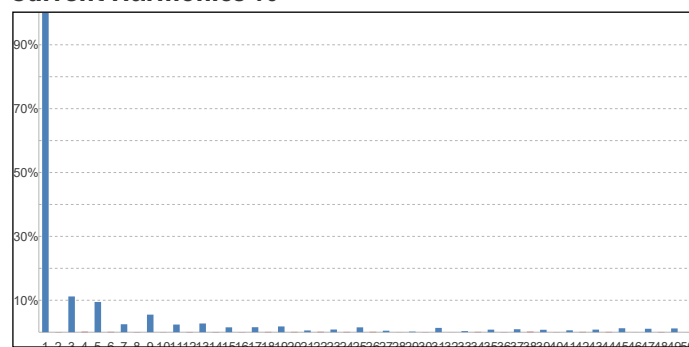


136-335 18W specific configuration

Colour measurement details


Total lumen output 1953 lm
 Correlated Colour Temperature 3137 K
 Colour coordinates CIE 1931 (x;y) = (0.427;0.399)
 Colour deviation from BBL Duv = -0.0005

TM30-18 Colour Fidelity Index R_f 86.8
 TM30-18 Colour Gamut Index R_g 98.1
 Colour Rendering Index (Ra) CRI 85.5
 Colour Rendering Index. (red component) $R_9 = 16.2$


Colour Quality Scale CQS = 84.3
 Television Lighting Consistency Index TLCI = 72

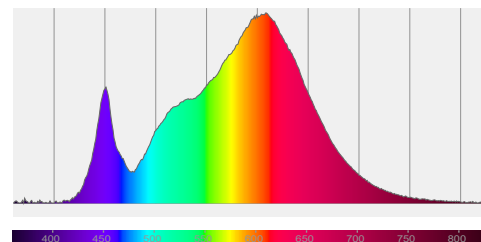

Relative spectral power distribution

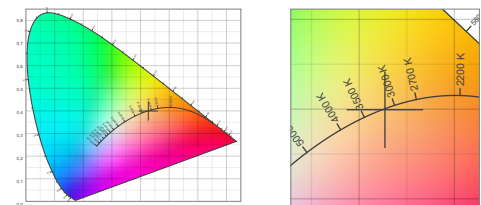

TM30 details

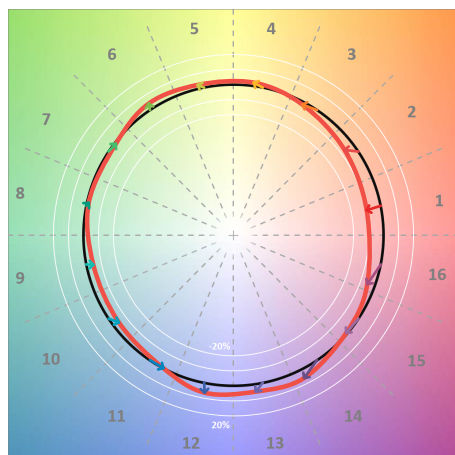


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	83	-10%	-1%
C2	84	-7%	6%
C3	80	-2%	10%
C4	89	2%	7%
C5	93	3%	4%
C6	92	4%	-2%
C7	88	-1%	-7%
C8	95	-1%	-2%
C9	92	-5%	1%
C10	87	-4%	6%
C11	84	0%	10%
C12	88	7%	2%
C13	89	5%	-6%
C14	82	5%	-14%
C15	81	-1%	-12%
C16	80	-6%	-15%

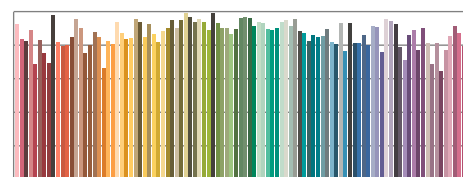

TM30-18 R_f -values per reference colour

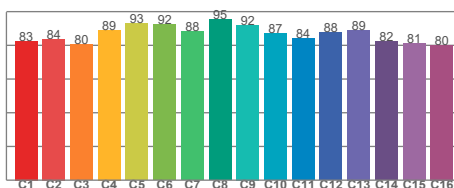


TM30-18 R_f -values per hue bin

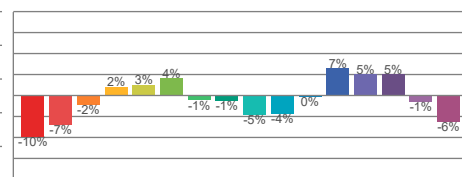


TM30 Chroma shift

Colour Quality details

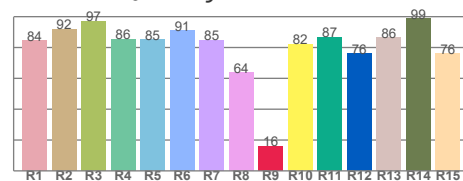

Colour Rendering Index

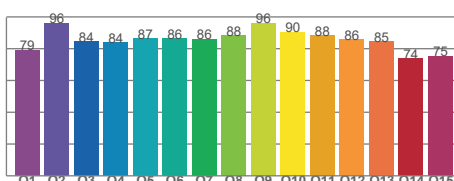

Colour Quality Scale