


Walraven 2S Clamp with Lining (M8)

(A05132)

for steel, copper, cast iron and plastic (multilayer) pipe

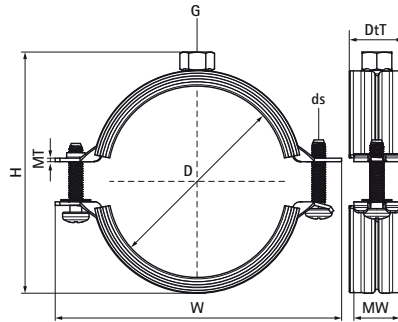

Features & benefits

- gapless range
- rubber lining grips in steel parts to prevent sliding of the lining
- anti loss washers prevent screws from falling out during installation
- material: steel
- zinc plated
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 22 dB(A)



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
33335014	10 - 14	DN 8	1/4	M8	51 x 32 x 23	20 x 1	M5	ITB (KOT)	330
33335019	15 - 19	DN 10	3/8	M8	56 x 37 x 23	20 x 1	M5	ITB (KOT)	330
33335024	20 - 24	DN 15	1/2	M8	62 x 43 x 23	20 x 1	M5	ITB (KOT)	330
33335030	25 - 30	DN 20	3/4	M8	69 x 50 x 23	20 x 1	M5	ITB (KOT)	330
33335037	31 - 37	DN 25	1	M8	75 x 56 x 23	20 x 1	M5	ITB (KOT)	330
33335046	38 - 46	DN 32	1 1/4	M8	84 x 66 x 23	20 x 1.25	M5	ITB (KOT)	500
33335052	47 - 52	DN 40	1 1/2	M8	93 x 75 x 23	20 x 1.25	M5	ITB (KOT)	500
33335061	53 - 61	DN 50	2	M8	99 x 81 x 23	20 x 1.25	M5	ITB (KOT)	500
33335067	62 - 67	-	-	M8	106 x 87 x 23	20 x 1.25	M5	ITB (KOT)	500