## **Product Environmental Profile**

# Acti9 iEM34xx / iEM35xx series Triphase kWh Meter LVCT/Rogowski coil, Modbus








### General information

Reference product	Acti9 iEM34xx / iEM35xx series Triphase kWh Meter LVCT/Rogowski coil, Modbus - A9MEM3455
Description of the product	The Acti9 iEM34xx / iEM35xx series Energy Meter is a cost-attractive, feature-rich range of DIN rail-mounted meters ideal for subbilling and cost allocation applications, which is designed for measurement with 1/3V or 1V output LVCT or Rogowski Coil in 3-phase circuits.
Description of the range	Single product
Functional unit	Acti9 iEM34xx / iEM35xx series is a three-phase energy meter with an LCD display. The meter will measure Active and Reactive Power, Active and Reactive Energy, Voltage and Current. With four quadrant Energy measurement during 10 years.
Specifications are:	Rated Voltage: 100-277 V and 173-480 V Network frequency: 50 - 60Hz Sampling rate = 32 samples/cycle Pollution degree: 2 IP40 front panel and IP20 body Degree of protection in accordance with the standard IEC 60529 IK08 Degree of protection in accordance with the standard IEC 62262

#### **Constituent materials**

Reference product mass

337 g including the product, its packaging, additional elements and accessories

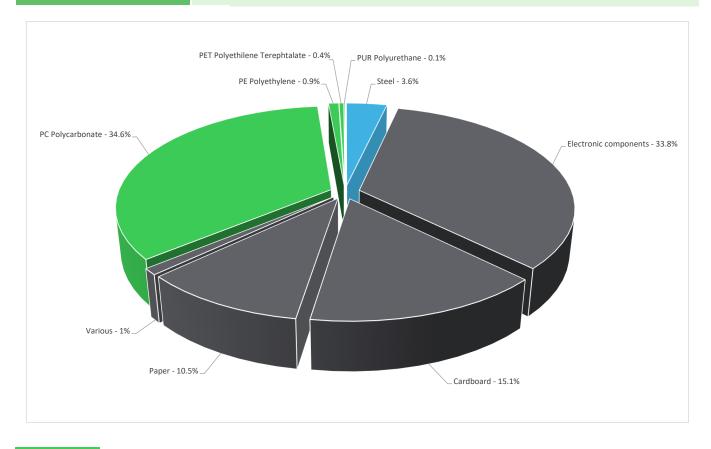

 Plastics
 36.0%

 Metals
 3.6%

 Others
 60.4%

#### Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website <a href="https://www.se.com">https://www.se.com</a>

### (19) Additional environmental information

End Of Life

Recyclability potential:

5%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

### **Environmental impacts**

Reference service life time	10 years									
Product category	Other equipments - Active product									
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study									
Electricity consumtion	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption									
Installation elements		The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal)								
Use scenario	The product is in active mode 5% of the time with a power use of 1.7W, in stand-by mode 70% of the time with a power use of 1.4W and in sleep mode 25% of the time with a power use of 1.19W, for 10 years									
Time representativeness	The collected data are representative of the year 2024									
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.									
Geographical	Final assembly site	Use p	hase	End-of-life						
representativeness	China	Glo	bal	Global						
	[A1 - A3]	[A5]	[B6]	[C1 - C4]						
Energy model used	Electricity Mix; Low voltage; 2020; China, CN	No energy used	Electricity Mix; Low voltage; 2020; Europe, EU-27 Electricity Mix; Low voltage; 2020; United States, US Electricity Mix; Low voltage; 2020; Australia, AU Electricity Mix; Low voltage; 2020; Asia Pacific, APAC	Global, European and French datasets are used.						

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		Acti9 iE	M34xx / iEM35xx s	series Triphase I	kWh Meter LVCT	/Rogowski coil	, Modbus - A9ME	M3455
Impact indicators	Unit	Total (without Module D)	[A1 - A3] Manufacturing	[A4] Distribution	[A5] Installation	[B1 - B7] Use	[C1 - C4] End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	7.25E+01	1.31E+01	7.10E-01	8.88E-03	5.80E+01	7.22E-01	-5.04E-02
Contribution to climate change-fossil	kg CO2 eq	7.25E+01	1.31E+01	7.10E-01	8.89E-03	5.79E+01	7.21E-01	-4.99E-02
Contribution to climate change-biogenic	kg CO2 eq	2.47E-02	0*	0*	0*	7.71E-02	3.27E-04	-4.09E-04
Contribution to climate change-land use and land use change	je kg CO2 eq	1.49E-04	1.49E-04	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.49E-06	1.60E-06	6.25E-07	0*	2.65E-07	1.12E-09	-7.93E-09
Contribution to acidification	mol H+ eq	4.07E-01	9.05E-02	2.92E-03	4.78E-05	3.13E-01	6.37E-04	-5.30E-04
Contribution to eutrophication, freshwater	kg P eq	1.39E-04	3.92E-05	8.29E-08	1.73E-08	8.76E-05	1.23E-05	-7.60E-08
Contribution to eutrophication marine	kg N eq	4.85E-02	9.68E-03	1.33E-03	2.24E-05	3.72E-02	2.51E-04	-3.08E-05
Contribution to eutrophication, terrestrial	mol N eq	6.10E-01	1.02E-01	1.44E-02	2.30E-04	4.91E-01	2.69E-03	-3.60E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.61E-01	3.46E-02	4.81E-03	5.48E-05	1.21E-01	6.77E-04	-1.39E-04
Contribution to resource use, minerals and metals	kg Sb eq	3.23E-03	3.21E-03	0*	0*	1.42E-05	0*	-1.71E-05
Contribution to resource use, fossils	MJ	1.42E+03	1.81E+02	8.81E+00	0*	1.22E+03	3.56E+00	-1.16E+00
Contribution to water use	m3 eq	8.19E+00	4.21E+00	3.59E-02	8.73E-03	3.74E+00	1.96E-01	-3.43E-02

	Acti9 iE	M34xx / iEM35xx s	series Triphase	kWh Meter LVCT	/Rogowski coil,	Modbus - A9Mi	EM3455
Unit	Total (without Module D)	[A1 - A3] Manufacturing	[A4] Distribution	[A5] Installation	[B1 - B7] Use	[C1 - C4] End of life	[D] - Benefits and loads
MJ	2.66E+02	5.34E+00	0*	0*	2.61E+02	0*	-1.53E-02
MJ	1.75E+00	1.75E+00	0*	0*	0*	0*	0.00E+00
MJ	2.68E+02	7.09E+00	0*	0*	2.61E+02	0*	-1.53E-02
MJ	1.41E+03	1.76E+02	8.81E+00	0*	1.22E+03	3.56E+00	-1.16E+00
MJ	5.83E+00	5.83E+00	0*	0*	0*	0*	0.00E+00
MJ	1.42E+03	1.81E+02	8.81E+00	0*	1.22E+03	3.56E+00	-1.16E+00
kg	4.25E-05	4.25E-05	0*	0*	0*	0*	0.00E+00
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
m³	1.94E-01	9.79E-02	8.36E-04	2.03E-04	8.75E-02	7.94E-03	-8.90E-04
kg	6.33E+01	6.14E+01	0*	0*	1.81E+00	1.18E-01	-1.38E+00
kg	1.47E+01	4.39E+00	0*	9.22E-02	1.01E+01	1.39E-01	-3.91E-02
kg	3.34E-03	1.41E-03	1.41E-04	0*	1.78E-03	5.95E-06	-1.77E-05
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
kg	1.42E-02	3.48E-04	0*	0*	0*	1.39E-02	0.00E+00
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
MJ	1.31E-04	9.63E-06	0*	0*	0*	1.22E-04	0.00E+00
	MJ MJ MJ MJ MJ MJ MJ kg MJ MJ kg kg kg kg kg kg	Unit         Total (without Module D)           MJ         2.66E+02           MJ         1.75E+00           MJ         2.68E+02           MJ         1.41E+03           MJ         5.83E+00           MJ         1.42E+03           kg         4.25E-05           MJ         0.00E+00           mJ         0.00E+00           mJ         1.94E-01           kg         6.33E+01           kg         1.47E+01           kg         0.00E+00           kg         1.42E-02           kg         0.00E+00	Unit         Total (without Module D)         [A1 - A3] Manufacturing           MJ         2.66E+02         5.34E+00           MJ         1.75E+00         1.75E+00           MJ         2.68E+02         7.09E+00           MJ         1.41E+03         1.76E+02           MJ         5.83E+00         5.83E+00           MJ         1.42E+03         1.81E+02           kg         4.25E-05         4.25E-05           MJ         0.00E+00         0*           m³         1.94E-01         9.79E-02           kg         6.33E+01         6.14E+01           kg         1.47E+01         4.39E+00           kg         0.00E+00         0*           kg         0.00E+00         0*           kg         0.00E+00         0*	Unit         Total (without Module D)         [A1 - A3] Manufacturing         [A4] Distribution           MJ         2.66E+02         5.34E+00         0°           MJ         1.75E+00         1.75E+00         0°           MJ         2.68E+02         7.09E+00         0°           MJ         1.41E+03         1.76E+02         8.81E+00           MJ         5.83E+00         5.83E+00         0°           MJ         1.42E+03         1.81E+02         8.81E+00           kg         4.25E-05         4.25E-05         0°           MJ         0.00E+00         0°         0°           MJ         0.00E+00         0°         0°           MJ         0.00E+00         0°         0°           kg         6.33E+01         6.14E+01         0°           kg         3.34E-03         1.41E-03         1.41E-04           kg         0.00E+00         0°         0°           kg         0.00E+00         0°         0°           kg         0.00E+00         0°         0°	Unit         Total (without Module D)         [A1 - A3] Manufacturing         [A4] Distribution         [A5] Installation           MJ         2.66E+02         5.34E+00         0*         0*           MJ         1.75E+00         1.75E+00         0*         0*           MJ         2.68E+02         7.09E+00         0*         0*           MJ         1.41E+03         1.76E+02         8.81E+00         0*           MJ         5.83E+00         5.83E+00         0*         0*           MJ         1.42E+03         1.81E+02         8.81E+00         0*           kg         4.25E-05         4.25E-05         0*         0*           MJ         0.00E+00         0*         0*         0*           kg         6.33E+01         6.14E+01         0*         0*           kg         1.47E+01         4.39E+00         0*         9.22E-02           kg	Unit         Total (without Module D)         [A1 - A3] Manufacturing         [A4] Distribution         [A5] Installation         [B1 - B7] Use           MJ         2.66E+02         5.34E+00         0°         0°         2.61E+02           MJ         1.75E+00         1.75E+00         0°         0°         0°           MJ         2.68E+02         7.09E+00         0°         0°         2.61E+02           MJ         1.41E+03         1.76E+02         8.81E+00         0°         1.22E+03           MJ         5.83E+00         5.83E+00         0°         0°         0°           MJ         1.42E+03         1.81E+02         8.81E+00         0°         1.22E+03           kg         4.25E-05         4.25E-05         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°           kg         6.33E+01         6.14E+01         0°         0°         0°	Unit         Module D)         Manufacturing         Distribution         Installation         Use         End of life           MJ         2.66E+02         5.34E+00         0°         0°         2.61E+02         0°           MJ         1.75E+00         1.75E+00         0°         0°         0°         0°           MJ         2.68E+02         7.09E+00         0°         0°         2.61E+02         0°           MJ         1.41E+03         1.76E+02         8.81E+00         0°         1.22E+03         3.56E+00           MJ         5.83E+00         5.83E+00         0°         0°         0°         0°           MJ         1.42E+03         1.81E+02         8.81E+00         0°         1.22E+03         3.56E+00           kg         4.25E-05         4.25E-05         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°         0°         0°           Mg         6.33E+01         6.14E+01

 $<sup>^{\</sup>star}$  represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 2.88E-02

<sup>\*</sup> The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		Acti9 iE	M34xx / i	iEM35xx series	Triphase I	kWh Me	ter LVCT	/Rogowski coil	, Modbus -
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	5.80E+01	0*	0*	0*	0*	0*	5.80E+01	0*
Contribution to climate change-fossil	kg CO2 eq	5.79E+01	0*	0*	0*	0*	0*	5.79E+01	0*
Contribution to climate change-biogenic	kg CO2 eq	7.71E-02	0*	0*	0*	0*	0*	7.71E-02	0*
Contribution to climate change-land use and land use char	ge kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	2.65E-07	0*	0*	0*	0*	0*	2.65E-07	0*
Contribution to acidification	mol H+ eq	3.13E-01	0*	0*	0*	0*	0*	3.13E-01	0*
Contribution to eutrophication, freshwater	kg P eq	8.76E-05	0*	0*	0*	0*	0*	8.76E-05	0*
Contribution to eutrophication marine	kg N eq	3.72E-02	0*	0*	0*	0*	0*	3.72E-02	0*
Contribution to eutrophication, terrestrial	mol N eq	4.91E-01	0*	0*	0*	0*	0*	4.91E-01	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.21E-01	0*	0*	0*	0*	0*	1.21E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	1.42E-05	0*	0*	0*	0*	0*	1.42E-05	0*
Contribution to resource use, fossils	MJ	1.22E+03	0*	0*	0*	0*	0*	1.22E+03	0*
Contribution to water use	m3 eq	3.74E+00	0*	0*	0*	0*	0*	3.74E+00	0*

Inventory flows Indicators		Acti9 iE	M34xx / il	EM35xx series	Triphase	kWh Me	ter LVCT	Rogowski coil	, Modbus - A9MEM3455
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.61E+02	0*	0*	0*	0*	0*	2.61E+02	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	2.61E+02	0*	0*	0*	0*	0*	2.61E+02	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.22E+03	0*	0*	0*	0*	0*	1.22E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	1.22E+03	0*	0*	0*	0*	0*	1.22E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	8.75E-02	0*	0*	0*	0*	0*	8.75E-02	0*
Contribution to hazardous waste disposed	kg	1.81E+00	0*	0*	0*	0*	0*	1.81E+00	0*
Contribution to non hazardous waste disposed	kg	1.01E+01	0*	0*	0*	0*	0*	1.01E+01	0*
Contribution to radioactive waste disposed	kg	1.78E-03	0*	0*	0*	0*	0*	1.78E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.4, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01312-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06						
		Supplemented by	PSR-0005-ed3-2023 06 06						
Verifier accreditation N°	VH48	Information and reference documents	www.pep-ecopassport.org						
Date of issue	01-2025	Validity period 5 years							
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006									
Internal	Internal External X								
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)									
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022									
The components of the present PEP may not be compared with components from any other program.									
Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"									

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
Head Office
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

SCHN-01312-V01.01-EN

Published by Schneider Electric

©2024 - Schneider Electric - All rights reserved

01-2025