


Walraven Britclips® FU ICC

(J1015)

for flange

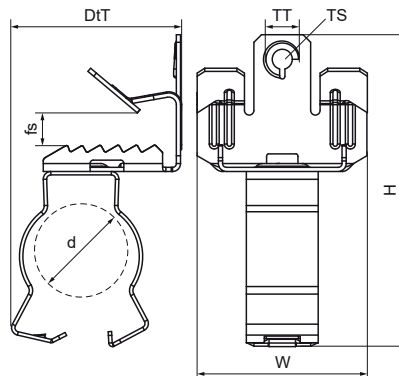

Features & benefits

- for a solid fixing under flanges without welding or drilling
- suitable for pipe or cable fixing horizontal, vertical or crossed with respect to the flange
- conduit clip swivels 360°
- conduit clip with jaw locking (use pliers to lock)
- material: spring steel (type CS70)
- surface treatment: Delta-Tone 9000 (480 hours)

Product Number	For flange size	Diameter	Thread Size	Thread Type	Total Height	Total Width	Total Depth	Maximum Allowed Load Faz
Reference Letter	fs	d	TS	TT	H	W	DtT	Fa,z
Unit description	mm	mm			mm	mm	mm	N
51121720	14 - 20	12 - 16	M6	Metric	77	45	41	250
51122407	3 - 7	19 - 22	M6	Metric	71	45	43	450
51122413	8 - 12.5	19 - 22	M6	Metric	76	45	43	450
51122420	14 - 20	19 - 22	M6	Metric	82	45	43	450
51122607	3 - 7	23 - 25	M6	Metric	71	45	43	450
51122613	8 - 12.5	23 - 25	M6	Metric	76	45	43	450
51122620	14 - 20	23 - 25	M6	Metric	82	45	43	450
51123207	3 - 7	26 - 32	M6	Metric	74	45	47	450
51123213	8 - 12.5	26 - 32	M6	Metric	79	45	47	450
51123220	14 - 20	26 - 32	M6	Metric	85	45	47	450
51124013	8 - 12.5	33 - 40	M6	Metric	95	45	55	450
51124020	14 - 20	33 - 40	M6	Metric	101	45	55	450