


## Walraven RapidRail® Connector 90° (L/L)

(G3505)

to make Walraven RapidRail® fabrications

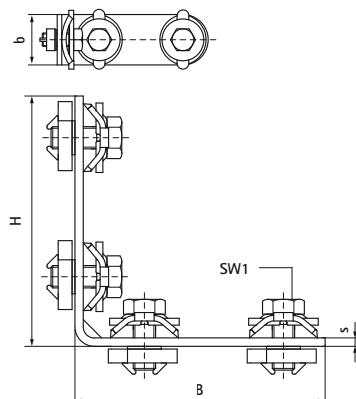

## Features &amp; benefits

- connector with pre-assembled Walraven RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for rails 27x18, 30x15, 30x20, 30x30, 30x45, 38x40
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated
- For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.



Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material	Width	Fixing Hole	Fixing Slot	Heart To Heart Distance	Torque	Maximum Moment For Allowed Installation	Maximum Load Faz	Maximum Allowed Load Faz
Reference letter		°	WxHxL	MT	w	FH	FS	k	Tinst.	Faz	Faz	
Unit description		°	mm x mm x mm	mm	mm	mm	mm	mm	Nm	N	N	
6584001	27x18, 30x15, 30x20, 30x30, 30x45, 38x40	90	30 x 103.5 x 103.5	3.00	30	8.2	12x4	50	15	1,562	720	