
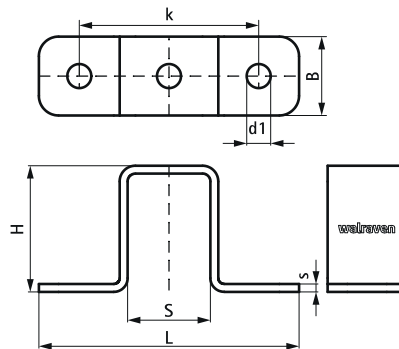


Walraven RapidStrut® Cross Connector (BUP1000)

(H28143)

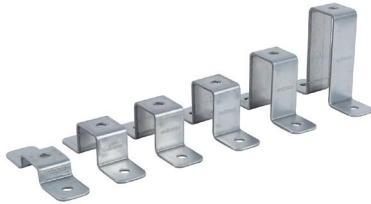

Features & benefits

- connector to make cross connections between Walraven RapidStrut® rails
- to connect Walraven RapidStrut® rails to wall or ceiling
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- user friendly by rounded edges
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation
Reference letter		α	$W \times H \times L$	MT	w	FH	k	T _{inst.}
Unit description		°	mm x mm x mm	mm	mm	mm	mm	Nm
66588292	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 24 x 141	4.00	40	12.2	100	30
66588294	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 44 x 141	4.00	40	12.2	100	30
66588295	41x51	90	40 x 54 x 141	4.00	40	12.2	100	30
66588296	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 64 x 141	4.00	40	12.2	100	30
66588298	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 84 x 141	4.00	40	12.2	100	30
66588299	41x62	90	40 x 126 x 141	4.00	40	12.2	100	30