


Walraven RapidStrut® U-Connector linear (BUP1000)

(H28103)

for linear rail connections

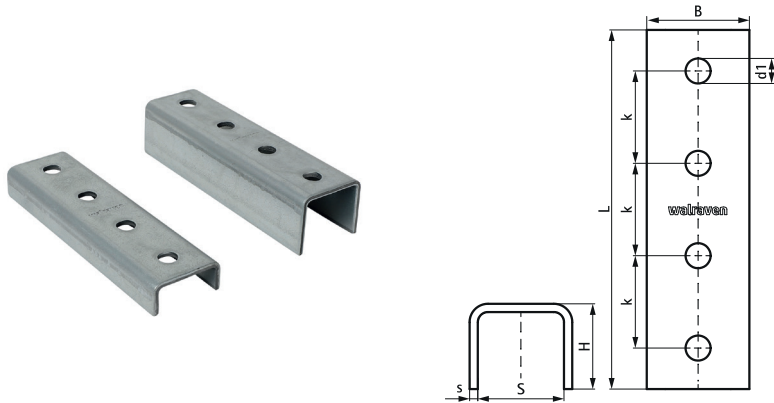

Features & benefits

- U-shaped for extra stability
- longitudinal connector for all Walraven RapidStrut® rails
- for strong connections and in combination with Double Walraven RapidStrut® rails it is advised to use linear connectors on both sides of the rail
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number | For Rail Type | Total Width x Total Height x Total Length | Material Thickness | Width | Fixing Hole | Torque Moment For Installation | Maximum Allowed Load Fax |
|------------------|-----------------------------------|---|--------------------|-------|-------------|--------------------------------|--------------------------|
| Reference letter | | W x H x L | MT | w | FH | T inst. | Fa,x |
| Unit description | | mm x mm x mm | mm | mm | mm | Nm | N |
| 66588121 | 41x21, 41x41, 41x51, 41x62, 41x82 | 50 x 21.5 x 175 | 4.00 | 42 | 12.2 | 25 | 1,870 |
| 66588141 | 41x21, 41x41, 41x51, 41x62, 41x82 | 50 x 41.5 x 175 | 4.00 | 42 | 12.2 | 25 | 2,280 |