
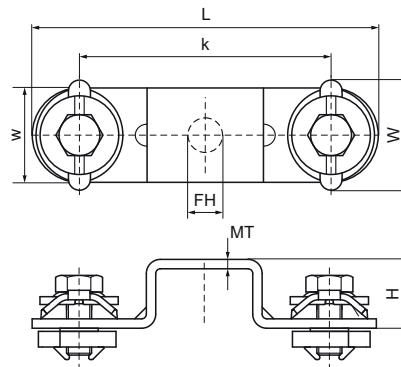


Walraven RapidRail® Cross Connector

(G3550)

to make Walraven RapidRail® fabrications



Features & benefits

- connector with pre-assembled Walraven RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for rails 27x18, 30x15, 30x20, 30x30, 38x40
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- for detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.
- zinc plated

Product Number	NRF Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Fixing Slot	Heart To Heart Distance	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference Letter			α	H	W	L	MT	w	FH	FS	k	T _{inst.}	F _{a,z}	F _{a,x}
Unit description			°	mm	mm	mm	mm	mm	mm	mm	mm	Nm	N	N
6584150		27x18	90	30	35	104	3.00	30	11	12x4	74	15	1,226	689
6584151	3489248	30x15	90	27	35	111.5	3.00	30	11	12x4	81.5	15	1,226	689
6584152	3484173	30x20	90	32	35	109	3.00	30	11	12x4	79	15	1,226	689
6584153		30x30	90	43	35	97	3.00	30	11	12x4	67	15	1,226	689
6584156		38x40	90	52	35	117	3.00	30	11	12x4	87	15	1,226	689