


## Myriad Deco - Housing only

MYRIAD DECO HOUSING SPOT 3000K PHDM WHITE REF  
2057985



### PRODUCT OVERVIEW

Product name	MYRIAD DECO HOUSING SPOT 3000K PHDM WHITE REF
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Warranty	5 years
Fixture luminous flux (lm)	1119
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768579853

### DATA TABLE

#### General data

Product name	MYRIAD DECO HOUSING SPOT 3000K PHDM WHITE REF
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior

## Myriad Deco - Housing only

MYRIAD DECO HOUSING SPOT 3000K PHDM WHITE REF  
2057985

Performance ambient temperature Tq (°C)	25
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1119
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Weight (kg)	0.39
Recessed Depth (mm)	72

### Packaging

Single packaging type	Carton
Product EAN number	5025768579853
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768579853
Packaging outer length / height (cm)	17.5

## PHOTOMETRY


## Myriad Deco - Housing only

MYRIAD DECO HOUSING SPOT 3000K PHDM WHITE REF  
2057985

0.5	0.26	E(0°) E(C0)	12470 8695
1.0	0.51	E(0°) E(C0)	3115 1424
1.5	0.77	E(0°) E(C0)	1398 633
2.0	1.03	E(0°) E(C0)	779 358
2.5	1.28	E(0°) E(C0)	499 228
3.0	1.54	E(0°) E(C0)	346 158

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 28.5°)

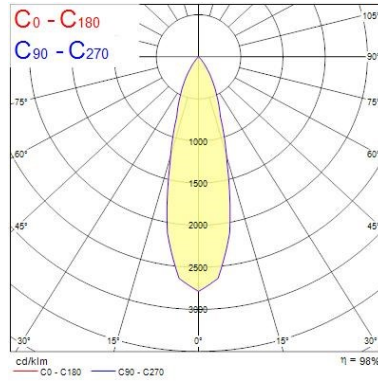

## TECHNICAL DRAWINGS

