



950-087 35W 4000K specific configuration  
 Tri-proof lightbar | 1260mm | IP65 | 25/30/35/40W | 3-CCT

Introduction

**Purpose of this Document**

This document provides information for 950-087 35W 4000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

**Results**

Total input power	31.8 W
Correlated Colour Temperature	4369 K
Total lumen output	4502 lm
Efficiency	142 lm/W


Electrical measurement details

**Input Power**


RMS Input voltage feed, $V_{RMS}$	230 V
RMS Input current feed, $I_{RMS}$	0.144 A
Total input power	31.8 W
Frequency of input power	50 Hz
Power factor	0.96
Displacement power factor	0.96
Total harmonic distortion of the current	11.13%
Total harmonic distortion of the voltage	2.54%

**Input Power Curve**


Voltage - Current

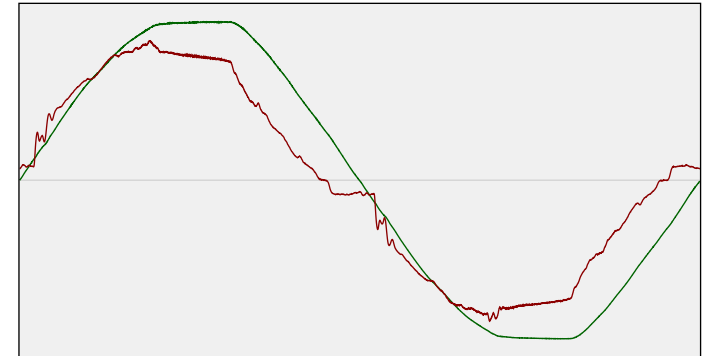

**Efficiency**

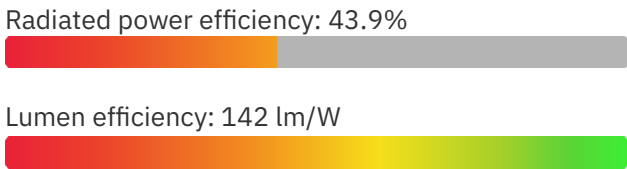

**Current Harmonics %**

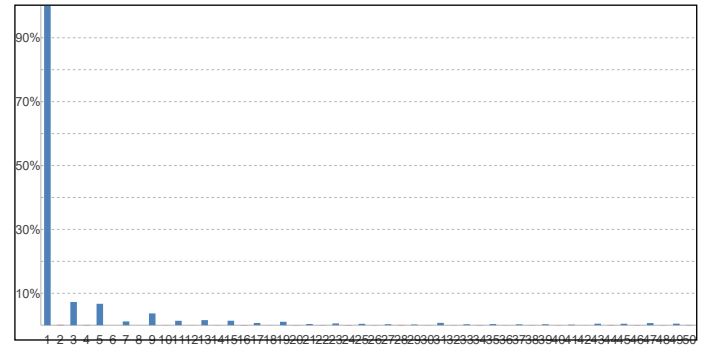

**Harmonics**

3rd Harmonic	7.27%
5th Harmonic	6.71%
7th Harmonic	1.19%
9th Harmonic	3.69%
11th Harmonic	1.38%




## 950-087 35W 4000K specific configuration

### Colour measurement details


Total lumen output 4502 lm  
 Correlated Colour Temperature 4369 K  
 Colour coordinates CIE 1931 (x;y) = (0.364;0.358)  
 Colour deviation from BBL Duv = -0.0038

TM30-18 Colour Fidelity Index  $R_f$  83.9  
 TM30-18 Colour Gamut Index  $R_g$  97.2  
 Colour Rendering Index (Ra) CRI 86.3  
 Colour Rendering Index. (red component)  $R_9 = 28.7$


Colour Quality Scale CQS = 82.8  
 Television Lighting Consistency Index TLCI = 75

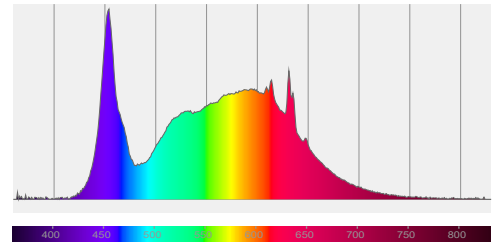

Relative spectral power distribution

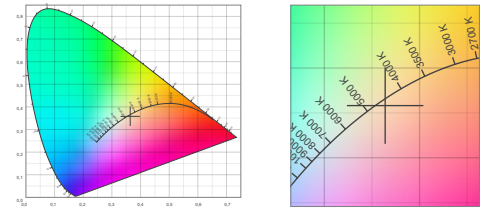

### TM30 details

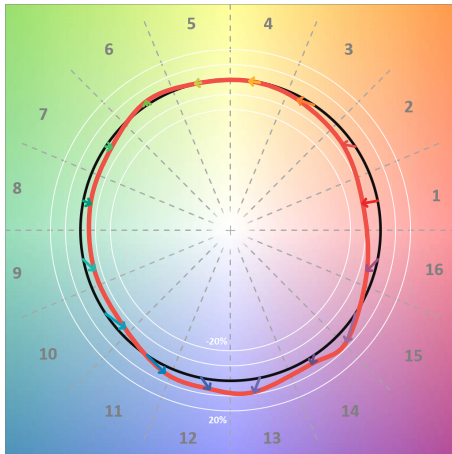


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	$R_f$	Shifts (%)	
		Chroma	Hue
C1	82	-10%	0%
C2	85	-6%	6%
C3	79	-3%	11%
C4	87	0%	7%
C5	89	0%	4%
C6	94	2%	-1%
C7	92	-4%	-2%
C8	90	-5%	1%
C9	86	-6%	8%
C10	76	-5%	15%
C11	74	3%	16%
C12	83	6%	7%
C13	86	9%	-6%
C14	89	4%	-4%
C15	77	5%	-19%
C16	82	-6%	-9%

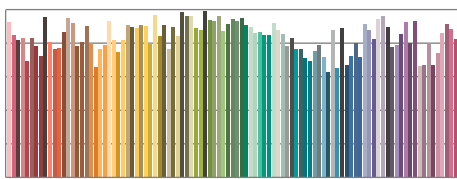

TM30-18  $R_f$ -values per reference colour

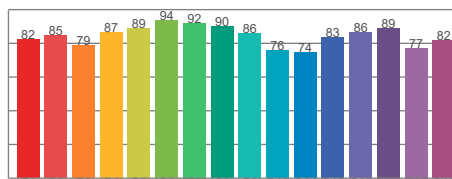


TM30-18  $R_f$ -values per hue bin

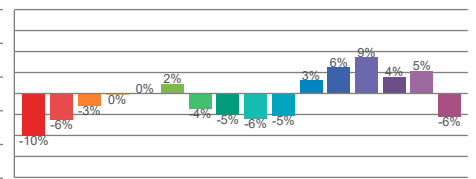


TM30 Chroma shift

### Colour Quality details

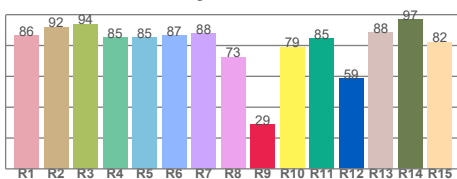

Colour Rendering Index

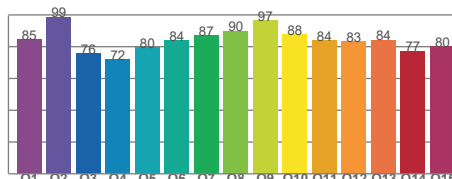

Colour Quality Scale