


Data Sheet | Item Number: 706-2300/102-100
System cable; for Siemens S7-300; 16 digital inputs for higher voltages; Length: 1 m;
Conductor cross-section: 0.34 mm²
<https://www.wago.com/706-2300/102-100>

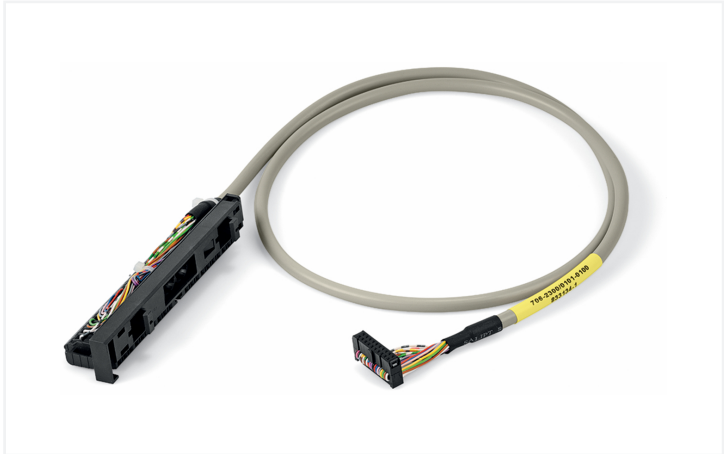

Similar to illustration

Color coding acc. to DIN VDE 47100 Cable 1: Channel 0-7		Connector WAGO 231 (IA)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	IN0.0	2	L0
Brown		2	IN0.1	3	L1
Green		3	IN0.2	4	L2
Yellow		4	IN0.3	5	L3
Grey		5	IN0.4	6	L4
Pink		6	IN0.5	7	L5
Blue		7	IN0.6	8	L6
Red		8	IN0.7	9	L7
Black		9	nc	nc	nc
Violet		10	N	11-16	N

Color coding acc. to DIN VDE 47100 Cable 2: Channel 8-15		Connector WAGO 231 (IB)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		11	IN1.0	12	L8
Brown		12	IN1.1	13	L9
Green		13	IN1.2	14	L10
Yellow		14	IN1.3	15	L11
Grey		15	IN1.4	16	L12
Pink		16	IN1.5	17	L13
Blue		17	IN1.6	18	L14
Red		18	IN1.7	19	L15
Black		19	nc	nc	nc
Violet		20	nc	nc	nc

Notes	
Note	If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Electrical data	
Inputs/outputs	16 digital inputs; for higher voltages
Operating voltage	≤ 250 VAC/VDC
Current per wire (max.)	0.75 A

Compatibility	
Siemens	
Siemens S7-300	6ES7 321-1FH00-0AA0

Connection Data	
Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1	
Pluggable connector	WAGO 231 Series
Pole number 1	10
Connection type	System
Wire cross-section	0.34 mm²



Connection 2	
Connector	WAGO 231 Series
Pole number	10
Connection type	System
Wire cross-section	0.34 mm²

Connection 3	
Connector	Siemens 6ES7-392-1BJ00-0AA0
Pole number	20
Connection type	System
Wire cross-section	0.34 mm²

Physical data	
Cable length	1 m

Material data	
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
GTIN	4045454880156

Product Classification	
UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 706-2300/102-100	



Documentation

System Description

WAGO System Wiring, Selection Guide	pdf 533.15 KB	
--	------------------	---