




V-060402: Manifold 1" , 1/2"-female thread 3/8"-air vent hole, 1" 2x1/2"x3/8"

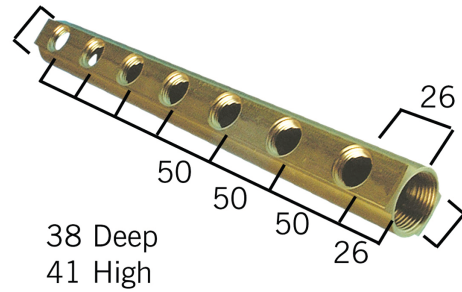

Commercial information

Messing verdeler 1" met ontluuchtingsopening 3/8", met aantal 1/2" aansluitingen

Certificates

Applications

Potable water, Heating, Cooling, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

Suitable for tap water	✓	Number of branches	2
Suitable for central heating water	✓	Number of branching directions	1
Suitable for cooling water	✓	Distance between offset	50 Millimetre
Suitable for compressed air	✗	Max. medium temperature (continuous)	95 Degrees celsius
Suitable for glycol	✓	Width	40 Millimetre
Mounting method	Surface mounting	Height	40 Millimetre
Model	Distributor/collector	Depth	38 Millimetre
Material	Brass	Length distributor	101 Millimetre
Surface protection	Untreated		
Shape	Throughflow with straight branches		
Nominal diameter connection 2	1 inch (25)		
Connection 2	Internal thread cylindrical BSPP-G (ISO 228-1)		
Nominal diameter branches	1/2 inch (15)		
Connection branches	Internal thread cylindrical BSPP-G (ISO 228-1)		
Deviant distance between branches	✗		
System specific	✓		
With filling/drain tap	✗		
With shut off valve	✗		
With de-aeration	✓		
With wall-mounting bracket	✗		
With mounting material	✗		
With legs	✗		
With insulation	✗		
KOMO certified	✗		
Type approval according to BBR/EKS	✗		

Related products

Product code	GTIN	Description
BE20	05414764048690	Henco Jaws (universal) BE/TH-Profile 20x2
H-0212-S	05414764048690	Insulated manifold bracket (single)
VS-06	05414764048690	Henco Manifold plug with O-ring 1"

Image

