


Walraven Bifix® 300 Stainless Steel (M10)

(M1006)

for stainless steel and plastic pipes

Features & benefits

- two-screw clamp
- with quick locking system
- material: stainless steel 1.4404 (AISI 316L)

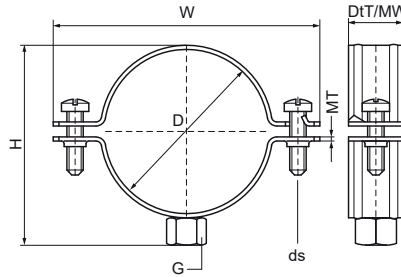

EPD

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	D	D	G	H	W	DtT	MW	MT	ds	Fo,z	
Unit description	mm		"		mm	mm	mm	mm	mm		N	
3027068	62 - 68	-	-	M10	80	102	20	20	1.25	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3027076	72 - 76	-	-	M10	87	109	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3027085	79 - 85	-	-	M10	97	118	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3027089	85 - 89	DN 80	3	M10	102	124	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3027105	100 - 105	-	-	M10	117	139	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3027111	106 - 111	-	-	M10	124	146	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027118	110 - 118	DN 100	4	M10	132	154	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027127	122 - 127	-	-	M10	140	163	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027134	129 - 134	-	-	M10	148	170	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027144	139 - 144	DN 125	5	M10	157	179	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027155	150 - 155	-	-	M10	172	192	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027162	157 - 162	-	-	M10	174	196	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027169	164 - 169	DN 150	6	M10	182	204	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027200	193 - 200	-	-	M10	216	256	25	20	2.50	M8	1,900	RAL-GZ 655/B, ITB (KOT), EPD
3027219	212 - 219	DN 200	8	M10	233	273	25	25	2.50	M8	1,900	RAL-GZ 655/B, ITB (KOT), EPD