


Threefold faceplate, horizontal 71 mm centre distance, for two 45x45 functions and a single switch function, Niko Rocker steel champagne coated

166-56706

4 year warranty

The Niko Rocker threefold horizontally oriented faceplate clicks onto two 45 x 45 mm functions and a single switch function that have been horizontally installed next to each other with a centre distance of 71 mm. The faceplate combines with any available Niko 45 x 45 mm finishing set and Niko Rocker for single switch functions. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of steel. The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), champagne coated. The upper frame is 2 mm thick and the lower frame 6 mm. Niko recommends a design combination with a finishing set in the following colour: steel champagne coated.

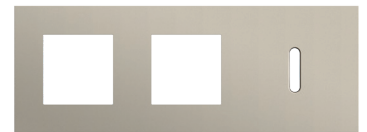

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

Technical data

Threefold faceplate, horizontal 71 mm centre distance, for two 45x45 functions and a single switch function, Niko Rocker steel champagne coated.

- Colour: enamelled champagne (approximately NCS S 4005 - Y20R, RAL 080 70 10)
- Recommended colour central plate: steel champagne coated
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material upper frame: The upper frame is made of steel.
- Material lower frame: The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), champagne coated.
- Varnish upper frame: The upper frame is enamelled champagne.
- Varnish lower frame: The lower frame is enamelled champagne.
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Lighting element
 - the faceplate is fitted with a light guide
 - the light guide is made of a translucent plastic
 - the light guide transports the light from the optional LED to the lever
 - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Centre-to-centre distance: 71 mm
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance

niko

of IK06

- Dimensions (HxWxD): 83 x 225 x 13 mm
- Dimensions visible (HxWxD): 83 x 225 mm
- Marking: CE

