
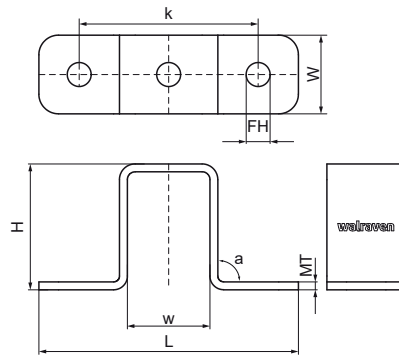


## Walraven RapidStrut® Cross Connector (BUP1000)

(H28143)

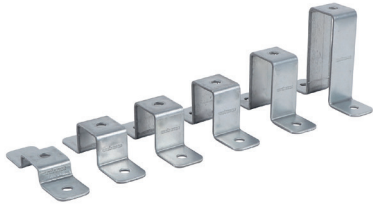

### Features & benefits

- connector to make cross connections between Walraven RapidStrut® rails
- to connect Walraven RapidStrut® rails to wall or ceiling
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- user friendly by rounded edges
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation
<i>Reference letter</i>		<i>a</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>k</i>	<i>T<sub>inst.</sub></i>
<i>Unit description</i>		°	mm	mm	mm	mm	mm	mm	mm	Nm
66588292	41x21	90	24	40	141	4.00	40	12.2	100	30
66588294	41x41	90	44	40	141	4.00	40	12.2	100	30
66588296	41x62	90	64	40	141	4.00	40	12.2	100	30
66588298	41x82	90	84	40	141	4.00	40	12.2	100	30
66588295	41x51	90	54	40	141	4.00	40	12.2	100	30
66588299	41x62	90	126	40	141	4.00	40	12.2	100	30