

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617



Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1512lm, luminaire efficacy: 72lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Product Overview


Product name	BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93

Concord


BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617

Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596171
Warranty	5 years

Photometry

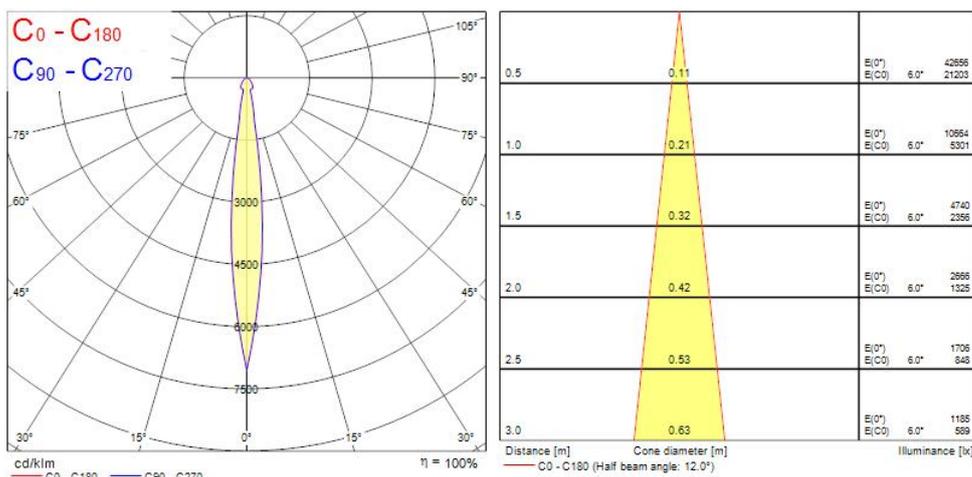

Technical drawings

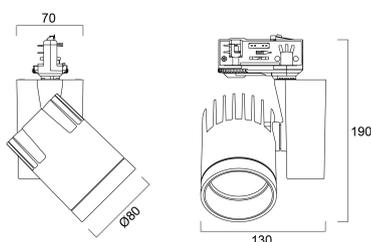

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617

Data table

GENERAL DATA

Product name	BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	500

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617

Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48

LIFETIME DATA

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	44000
Lifespan L90 B20	37000
Lifespan L90 B10	34000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

PACKAGING

Single packaging type	Carton
Product EAN number	5025768596171
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596171
Packaging outer length / height (cm)	16.0

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
2059617

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No