

Product data

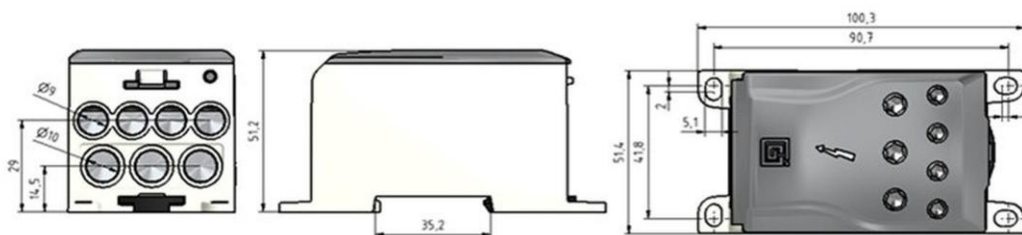
Product code	VG03-0010	STK-code	1912096	EAN-code	6410019120967
Product name	OJL-connector 400 FBB S			ETIM class	EC000276
Wires	3xCu(6-50 mm²)/ 4xCu(2,5-35mm²) S				

Technical data

Nominal current (IEC)	Cu	600	A
	Al	380	A
Nominal voltage (IEC)		1000	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		10x(1x24)	mm ²
Tightening torque			
		-	
		-	
		-	
	2,5-35 mm ²	6	Nm
	6-50 mm ²	10	Nm
	10xCu(1x24)	10	Nm
		-	
Input	Busbar Cu 10x(1x24)		
Output	3x Cu(6-50 mm²) / 4x Cu (2,5-35mm²) S		
		-	
Operating temperature		80	°C
Weight		247	g
IP-protection		IP20	
Standards	EN 61238-1:2003; EN 60947-7-1:2009		
Color / Material	Grey Cover, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium		
Mounting / Connection	DIN-rail and screw mounting (4xM5)		


Description

Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 7 output cables. Input connection with flexible busbar. Max 10x(Cu 1x25). This model has sealable cover lid.

Drawing

Package

Package	Box	Pcs / Package	8	Weight [kg]	2,10
Length [mm]	205	Width [mm]	180	Height [mm]	135

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi