


Beacon LED

BEACON 93CRI 3K NARROW BEAM L3+DALI BLACK
2059620

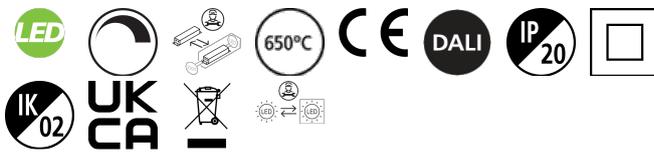

PRODUCT OVERVIEW

Product name	BEACON 93CRI 3K NARROW BEAM L3+DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596201

DATA TABLE

General data

Product name	BEACON 93CRI 3K NARROW BEAM L3+DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal

Beacon LED

BEACON 93CRI 3K NARROW BEAM L3+DALI BLACK

2059620

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	52

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	44000
Lifespan L90 B20	37000
Lifespan L90 B10	34000

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7


Packaging

Beacon LED

BEACON 93CRI 3K NARROW BEAM L3+DALI BLACK
2059620

Single packaging type	Carton
Product EAN number	5025768596201
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596201
Packaging outer length / height (cm)	16.0

PHOTOMETRY

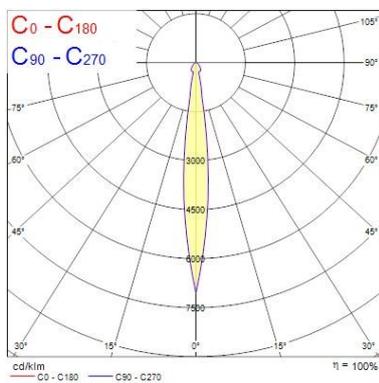

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.11	4266	2122
1.0	0.21	1066	531
1.5	0.32	474	236
2.0	0.42	296	135
2.5	0.53	178	84
3.0	0.63	118	59

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 12.0°)

TECHNICAL DRAWINGS

