



## PHOTOMETRIC LIGHT REPORT

**Track spot | 48V | Ø45mm  
| white | 15W | 2700K |  
36° | DALI**

**Article number: 168-121**



Go to the  
webshop  
of Tronix  
Lighting



**TRONIX**



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

## Introduction

### Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 168-121. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

### Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

### Product 168-121 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

### Compliance & Certification

Item 168-121 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

### Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

### Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

### Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	14.1 W – PF 1.0 – DPF 1.0
Frequency of Input Power	0 Hz
Warm-up Time and Variation	Lamp stabilized in 20 min 18 sec --3.4%

### Tested light source

Manufacturer and Order Code	Tronix Lighting – 168-121
Product Description	Track spot   48V   Ø45mm   white   15W   2700K   36°   DALI

### Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	988 lm – 0.2% / 99.8%
Efficiency	70 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	2624 cd – 36.7°
Correlated Colour Temperature	CCT = 2698 K
Colour Shift. CIE duv	Duv -0.0022
Colour Rendering Index	CRI 93.4
Colour Rendering TM30-18	R <sub>f</sub> 89.1 – R <sub>g</sub> 105.0
Television Lighting Consistency Index	TLCI = 83
Flicker	SVM n/a – PstLM n/a



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

Electrical measurement details

**Input Power**

RMS Input voltage feed. $V_{RMS}$	48.0 V
RMS Input current feed. $I_{RMS}$	0.294 A
Total input power	14.1 W
Frequency of input power	0 Hz
Power factor	1.0
Displacement power factor	1.0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

**Input Power Curve**

Voltage - Current



**Efficiency**

Radiated power efficiency: 26.0%



Lumen efficiency: 70 lm/W



**Current Harmonics %**



**Harmonics**

3rd Harmonic	n/a
5th Harmonic	n/a
7th Harmonic	n/a
9th Harmonic	n/a
11th Harmonic	n/a

Stabilization Details

**Warm-up Conditions**

Stable period	15 min
Stable change max	2.0%
Minimum warm-up time	15 min

**Colour temperature change during warm-up**

CCT start	2716 K
CCT shift	-18 K
CCT end	2698 K

**Warm-up Results**

Total warmup time	Lamp stabilized in 20 min 18 sec
Warmup variation	-3.4%

**Output intensity change during warm-up**

Output start	1021 lm
Output change	-33 lm
Output end	988 lm




168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

## Colour measurement details



Total lumen output 988 lm  
 Correlated Colour Temperature 2698 K  
 Colour coordinates CIE 1931 (x;y) = (0.457;0.404)  
 Colour deviation from BBL Duv = -0.0022

TM30-18 Colour Fidelity Index  $R_f$  89.1  
 TM30-18 Colour Gamut Index  $R_g$  105.0  
 Colour Rendering Index (Ra) CRI 93.4  
 Colour Rendering Index. (red component)  $R_9 = 74.2$


Colour Quality Scale CQS = 88.3  
 Television Lighting Consistency Index TLCI = 83

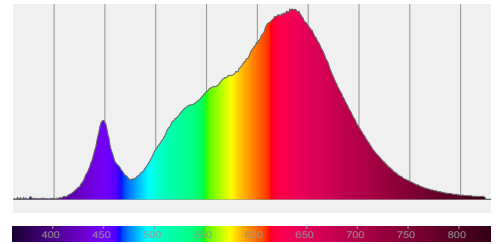

Relative spectral power distribution



## TM30 details

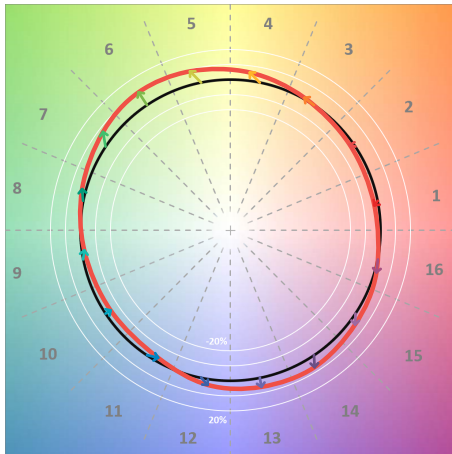


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	$R_f$	Shifts (%)	
		Chroma	Hue
C1	92	-3%	-3%
C2	93	-2%	3%
C3	85	1%	8%
C4	87	5%	8%
C5	88	9%	6%
C6	86	10%	0%
C7	84	7%	-7%
C8	89	2%	-7%
C9	90	-2%	-6%
C10	93	-4%	0%
C11	88	-3%	7%
C12	88	4%	5%
C13	91	6%	0%
C14	90	7%	-4%
C15	88	4%	-6%
C16	89	1%	-9%

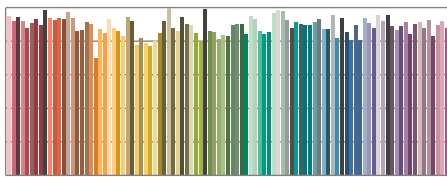

TM30-18  $R_f$ -values per reference colour

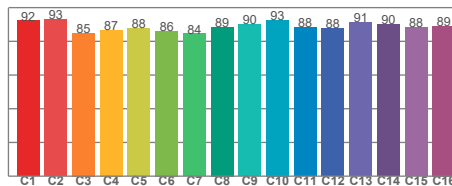


TM30-18  $R_f$ -values per hue bin

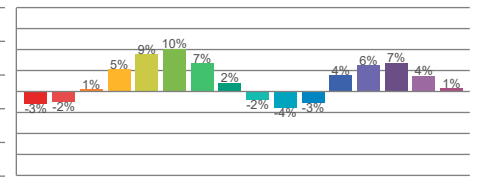


TM30 Chroma shift

## Colour Quality details

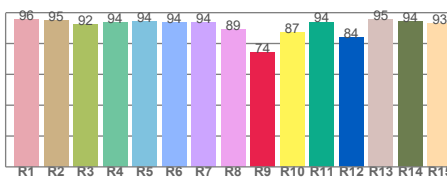

Colour Rendering Index

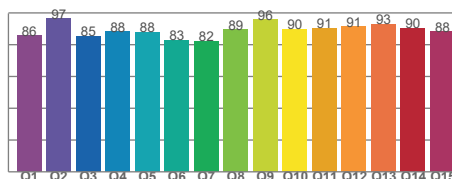

Colour Quality Scale



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

Flicker / temporal light artefacts details

**Measurement conditions**

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

**Flicker indices according to Illuminating Engineering Society (IES)**


Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

**TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)**


An LED luminaire is considered flicker-free if the SVM value is  $\leq 0.4$  and if the PstLM value is  $\leq 1.0$

PstLM value ( $F < 80$ Hz)	n/a
SVM value ( $80 < F < 2000$ Hz)	n/a


**Flicker frame (one flicker period in time domain)**

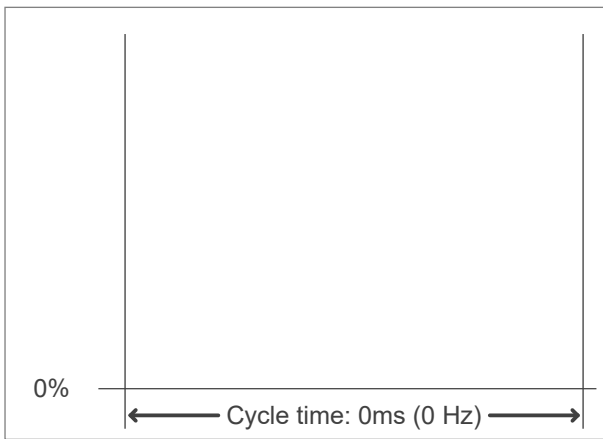

**Flicker FFT (flicker curve in frequency domain)**

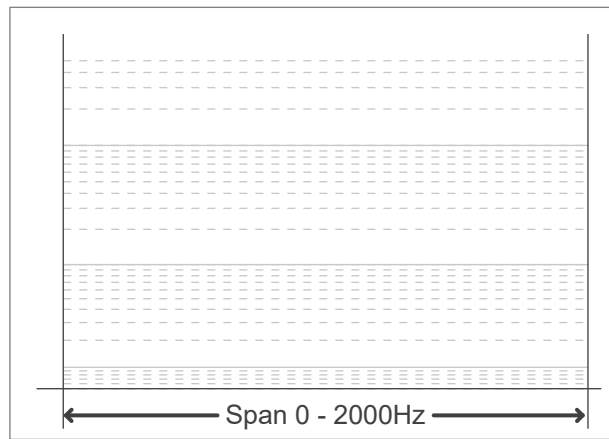

**IEEE 1789-2015 Lighting Flicker Risk Zones**

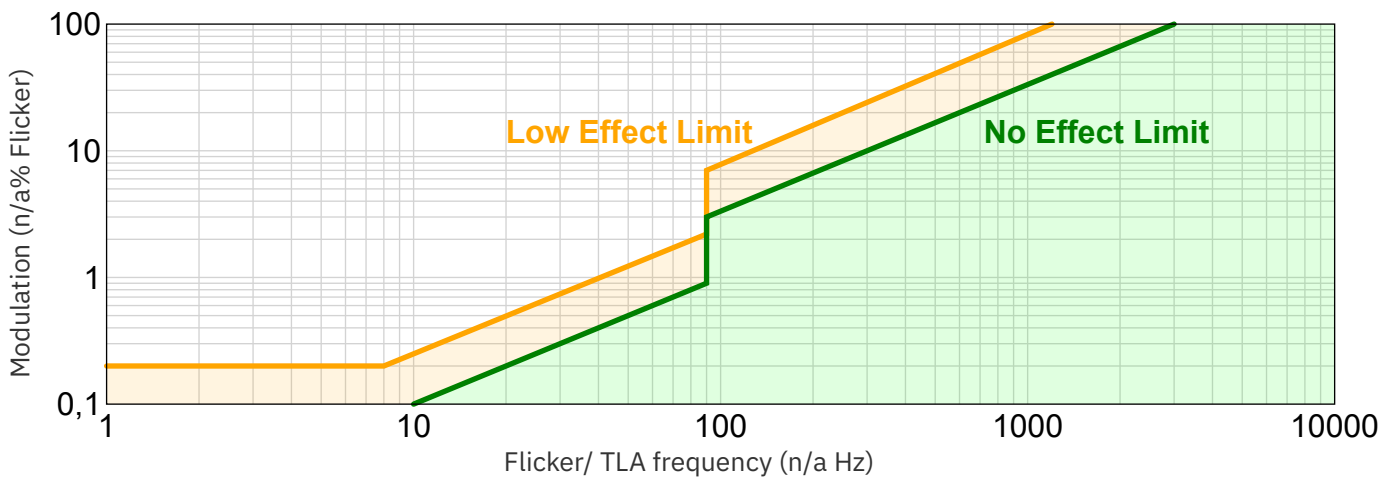




168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

Beam angle

**Luminous Intensity diagram**

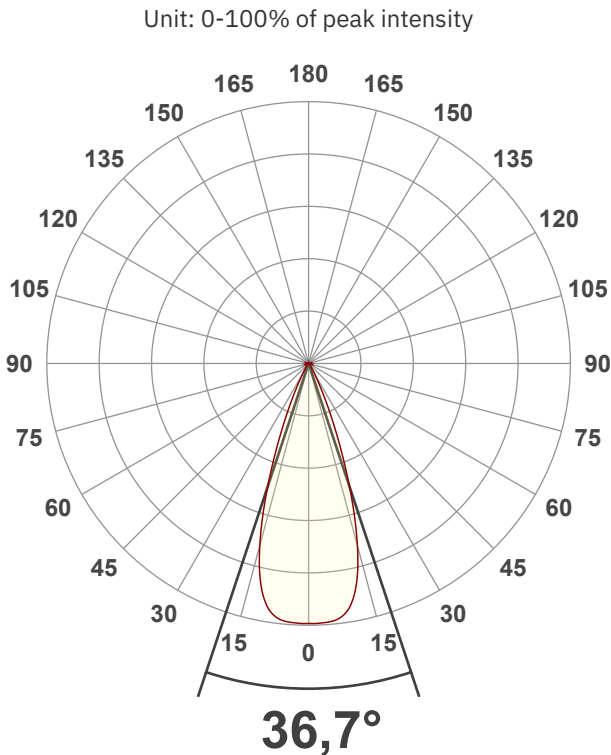

**Main Values**

Output (total Lumen)	988 lm
Lumen Up/Down	0.2% / 99.8%
Peak Intensity	2624 cd
Beam Angle (50%)	36.7°
Beam Angle (90%)	36.7°
Beam Angle (10%)	36.7°

**Cut-off Angle**

Average 2.5%	65.7°
--------------	-------

**Field Angle**

Average 10%	53.2°
-------------	-------

**Intensity Ratio**


In 120° cone	99.5%
In 90° cone	99.0%

**C planes**

C000-C180

C090-C270


**Linear distribution diagram - Intensity (candela) vs γ-angle**

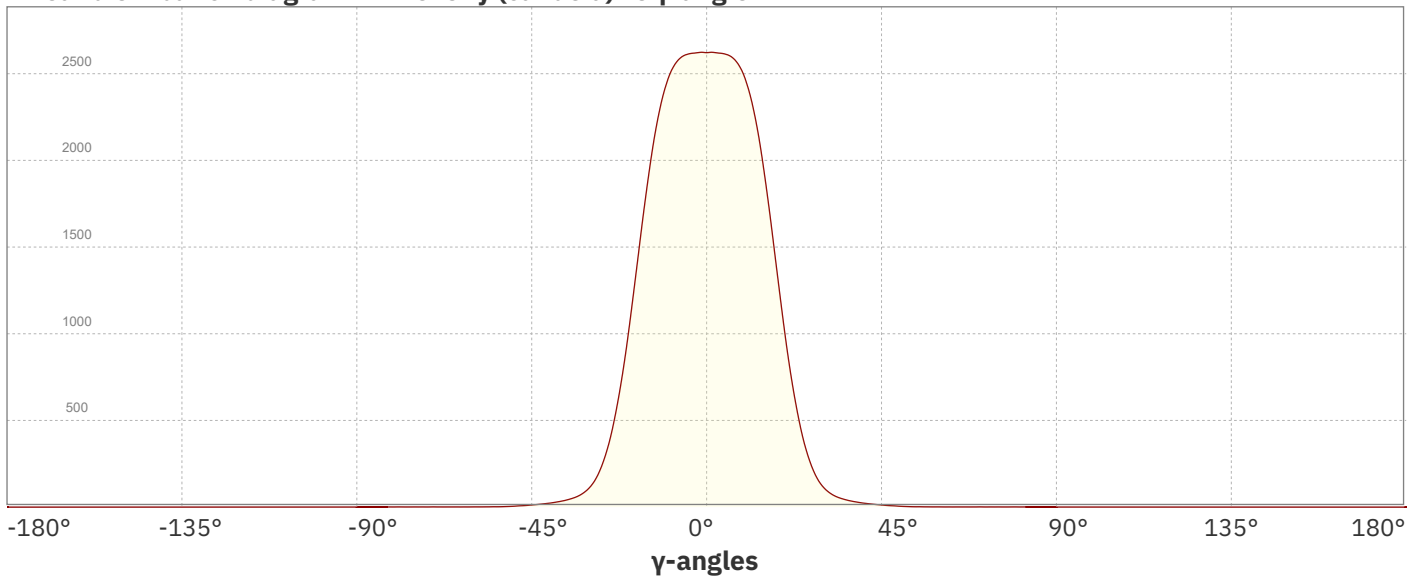



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

Beam Details

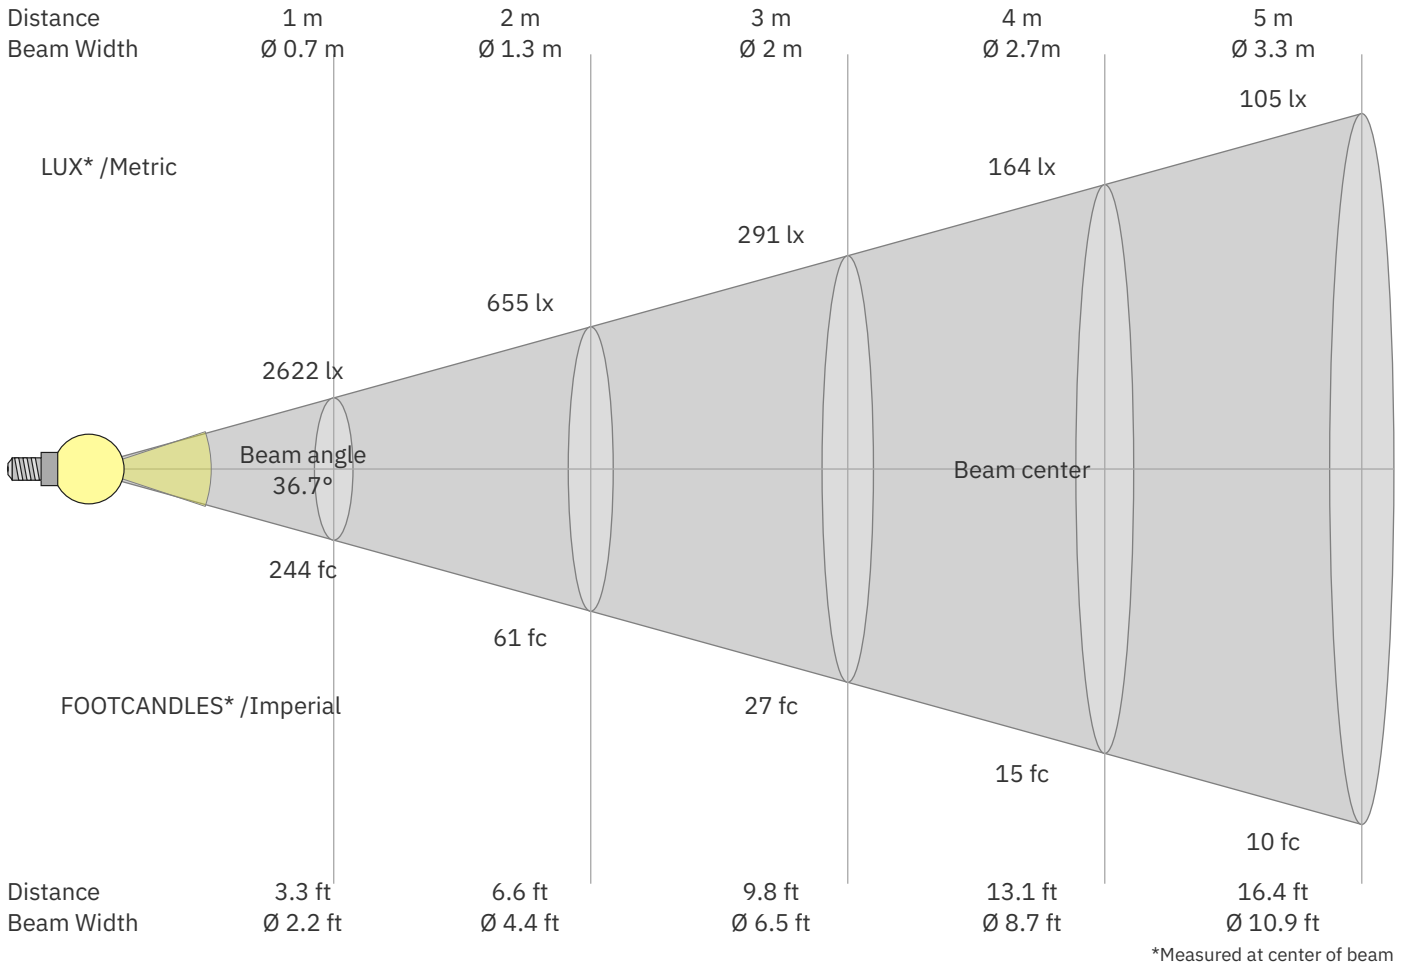

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
2622	655	291	164	105	73	54	41	32	26	22	18	16	13	12	10	9	8	7	7	lux
243.6	60.9	27.1	15.2	9.7	6.8	5	3.8	3	2.4	2	1.7	1.4	1.2	1.1	1	0.8	0.8	0.7	0.6	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2622	2622	2617	2602	2558	2463	2298	2053	1734	1377	1024	717	477	303	186	116	77	55	41	32	cd
100%	100%	100%	99%	98%	94%	88%	78%	66%	53%	39%	27%	18%	12%	7%	4%	3%	2%	2%	1%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2622	2622	2617	2602	2558	2463	2298	2053	1734	1377	1024	717	477	303	186	116	77	55	41	32	cd
100%	100%	100%	99%	98%	94%	88%	78%	66%	53%	39%	27%	18%	12%	7%	4%	3%	2%	2%	1%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2622	2622	2617	2602	2558	2463	2298	2053	1734	1377	1024	717	477	303	186	116	77	55	41	32	cd
100%	100%	100%	99%	98%	94%	88%	78%	66%	53%	39%	27%	18%	12%	7%	4%	3%	2%	2%	1%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2622	2622	2617	2602	2558	2463	2298	2053	1734	1377	1024	717	477	303	186	116	77	55	41	32	cd
100%	100%	100%	99%	98%	94%	88%	78%	66%	53%	39%	27%	18%	12%	7%	4%	3%	2%	2%	1%	of 0°val

Document revision date: 17-2-2026 Measurement serial: VFR-260217-12966-SW



168-121 Track spot | 48V | Ø45mm | white | 15W | 2700K | 36° | DALI

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	13.0	13.4	13.1	13.6	13.8	13.0	13.4	13.1	13.6	13.8
	3H	12.8	13.4	13.1	13.5	13.7	12.8	13.4	13.1	13.5	13.7
	4H	12.8	13.4	13.2	13.6	13.8	12.8	13.4	13.2	13.6	13.8
	6H	13.0	13.4	13.3	13.7	14.1	13.0	13.4	13.3	13.7	14.1
	8H	13.1	13.5	13.4	13.9	14.2	13.1	13.5	13.4	13.9	14.2
	12H	13.3	13.7	13.6	14.1	14.5	13.3	13.7	13.6	14.1	14.5
4H	2H	12.6	13.2	13.0	13.4	13.7	12.6	13.2	13.0	13.4	13.7
	3H	12.7	13.1	13.0	13.5	13.9	12.7	13.1	13.0	13.5	13.9
	4H	12.7	13.1	13.1	13.5	14.0	12.7	13.1	13.1	13.5	14.0
	6H	12.9	13.4	13.4	13.7	14.1	12.9	13.4	13.4	13.7	14.1
	8H	13.2	13.6	13.7	13.9	14.3	13.2	13.6	13.7	13.9	14.3
	12H	13.5	13.8	14.0	14.2	14.7	13.5	13.8	14.0	14.2	14.7
8H	4H	12.7	13.1	13.2	13.4	13.8	12.7	13.1	13.2	13.4	13.8
	6H	13.1	13.4	13.6	13.8	14.3	13.1	13.4	13.6	13.8	14.3
	8H	13.5	13.7	14.0	14.2	14.9	13.5	13.7	14.0	14.2	14.9
	12H	14.0	14.2	14.6	14.7	15.3	14.0	14.2	14.6	14.7	15.3
12H	4H	12.6	13.0	13.1	13.4	13.8	12.6	13.0	13.1	13.4	13.8
	6H	13.2	13.4	13.7	13.9	14.5	13.2	13.4	13.7	13.9	14.5
	8H	13.6	13.8	14.2	14.3	14.9	13.6	13.8	14.2	14.3	14.9

Variations with the observer position for the luminaire spacings. S:

S = 1.0H	3.1 / -1.9	3.1 / -1.9
S = 1.5H	5.4 / -2.0	5.4 / -2.0
S = 2.0H	7.2 / -2.3	7.2 / -2.3

Coefficients of Utilization

Ceiling reflectance	80	70	50	30	10	0												
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0			
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0			
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	115	112	110	109	112	110	108	107	106	105	104	103	101	100	99	98	98	96
2	111	107	104	101	108	105	102	100	102	100	98	99	97	95	96	95	94	92
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88
4	103	97	93	90	101	96	92	89	94	91	88	92	90	87	91	88	86	85
5	100	93	89	86	98	92	88	85	91	87	85	89	86	84	88	85	83	82
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79
7	93	86	82	79	92	86	82	79	85	81	78	84	80	78	83	80	77	76
8	90	83	79	76	89	83	79	76	82	78	75	81	78	75	80	77	75	74
9	88	80	76	73	87	80	76	73	79	75	73	78	75	72	78	75	72	71
10	85	78	73	71	84	77	73	70	77	73	70	76	73	70	75	72	70	69