

Concord

MC2 D/I 1.2M 3K DALI WHT OPAL
2071455



Features

- MC2 D/I 1.2M 3K DALI WHT OPAL LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 3000K warm white, total system power: 29W, total fixture output: 3900lm, luminaire efficacy: 134lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview

Cap/Base

N/A


Control gear type

Electronic ballast

Concord

MC2 D/I 1.2M 3K DALI WHT OPAL
2071455

Photometry

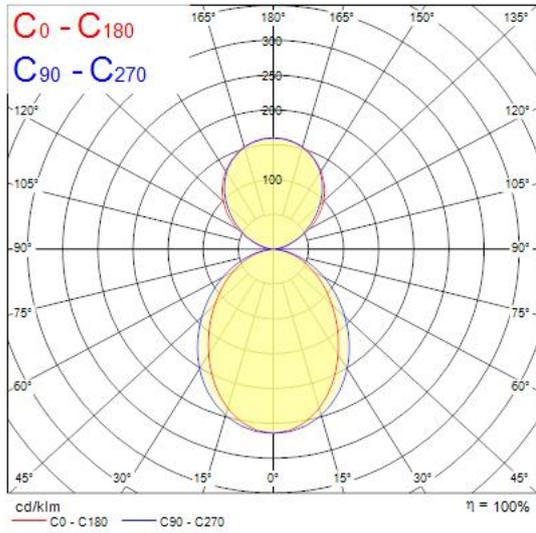

Technical drawings

