


## Beacon LED

*BEACON 93CRI 4K WIDE BEAM L3 TRAILING EDGE WHITE*  
2059647



### Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1853lm, luminaire efficacy: 88lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

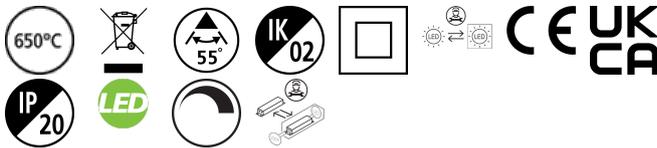

### PRODUCT OVERVIEW

Product name	BEACON 93CRI 4K WIDE BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	1853
Fixture luminous flux (lm)	1853
Luminaire efficacy (lm/W)	88
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	55
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: trailing edge only
Minimum dimming level (%)	3
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596478

## Beacon LED


*BEACON 93CRI 4K WIDE BEAM L3 TRAILING EDGE WHITE*  
2059647

### PHOTOMETRY

0.5	0.52	E(0) E(C0)	21.5°	8405 3216
1.0	1.04	E(0) E(C0)	21.5°	2284 829
1.5	1.56	E(0) E(C0)	21.5°	1544 588
2.0	2.08	E(0) E(C0)	21.5°	981 377
2.5	2.60	E(0) E(C0)	21.5°	573 233
3.0	3.12	E(0) E(C0)	21.5°	357 142

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 55.9°)

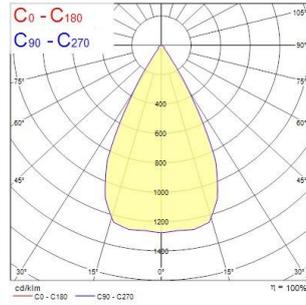

### TECHNICAL DRAWINGS

