



Simon | K45

IP66 Watertight
floor boxes

simon





Simon | K45

The new range of Simon watertight floor boxes has been developed to offer any possible type of connection in a space, whether indoors or outdoors, and to guarantee an IP66 level of protection when the lid is fully closed.



Stations
and airports



Shopping
malls



Convention
centres



Hotels
and Hospitals



Sports
centres



Outdoor
terraces

DESIGN AND FUNCTION:

/ PROTECTION AGAINST ADVERSE ENVIRONMENTS



IP66

Simon's range of watertight floor boxes ensures a **robust, safe, watertight** installation, resistant to dust and a flow of water up to 1 kg/cm² in any direction.



IK08

The new range of watertight floor boxes is the result of product improvements and innovation, offering a response to the many demands for a range of specific products for those **areas that require a robust and long-lasting product**, as it can support a maximum weight of 2,000 kg and offers **IK08** protection grade (**version 2 modules**) when the lid is fully closed.



/ OPTIMAL CONNECTION FOR VOICE AND DATA


The new box design allows for an optimal **bending radius** for **connecting high-category cables carrying voice and data** to guarantee connectivity in the future.



/ QUALITY CERTIFICATES

Product design based on installations **in paved and raised floors**, in accordance with the **UNE EN 60670** standard, with a varied range to cater to different capacity functions to meet the customer's needs. The range of watertight floor boxes are made of **AISI 304 / EN 1.4301** austenitic **stainless steel** because it has high resistance to corrosion and is a hygienic and heat resistant stainless steel, sensitized at temperatures between 425° and 815° C."





/ PRACTICAL FOR CABLES ACCESS

The innovative design of the hinged lid offers effective protection for the connected plugs and allows safe passage for the connecting cables. It ensures that the lid is perfectly flat when there are no cables emerging. The lid's opening angle has also been increased to allow a comfortable fit for longer plugs.



/ FLUSH WITH THE FLOOR

The compact frameless design has reduced its size by 30%, making the product fit even better into its surroundings. In raised floors, the outer frame and hinged cover are made with the same material and coverings to ensure a uniform appearance.

/ EASY MAINTENANCE

The design of the box makes maintenance and cleaning easier without the need to dismount it. It includes a drainage system with a silicon tube to drain liquids and condensation. The screed box has watertight cones to maintain IP protection for cable access and a protective cover to prevent aggregates entering when sweeping the floor.

/ TWO TYPES OF SCREED BOX:



Raised floor



Pavement



/ NEW FINISHES AND A LARGER RANGE

Finishes to match current trends in floor coverings, offering perfect integration and elegant, sophisticated finishes.



Black finish
For indoor use only



Stainless Steel finish
Used indoors and outdoors

/ EASY OPENING SYSTEM

The range of floor boxes has two types of openings, **the manual system** is opened by turning the metal cylinder by 45°, while the **protected opening system** requires a size 6 Allen key to turn the metal cylinder, to restrict access.



Manual closure
Suitable for less demanding environments




Security closure
Ideal for restricting access to the connections in spaces open to the public

/ NEW DRAINAGE METHOD

The screed box **includes a drainage system** to drain off liquid accumulating in the socket and a **silicon tube** to connect to the sump and remove any possible condensation from the interior. The screed box is supplied with **watertight cones** to maintain IP protection for cable access and a **protective cover** to prevent aggregates entering when sweeping the floor.



The product range has extended, allowing to fit 1 or 2 45mm functions to double the functional capacity in one box.

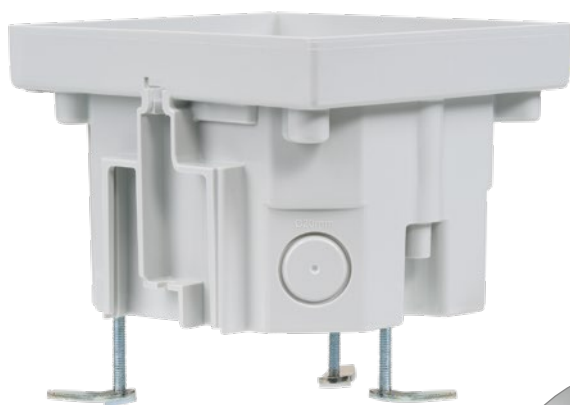

/ ACCESSORIES

New accessories to reduce the installation time, like the accessory that lets you align the screed box with the floor when the slab floor is irregular floor or to achieve an IP54 grade with connected patch-cords.




QUICK INSTALLATION


Installing the watertight box is simple and consists of only 3 components:

1 / Screed box

2 / Function-holder unit

3 / Required functions

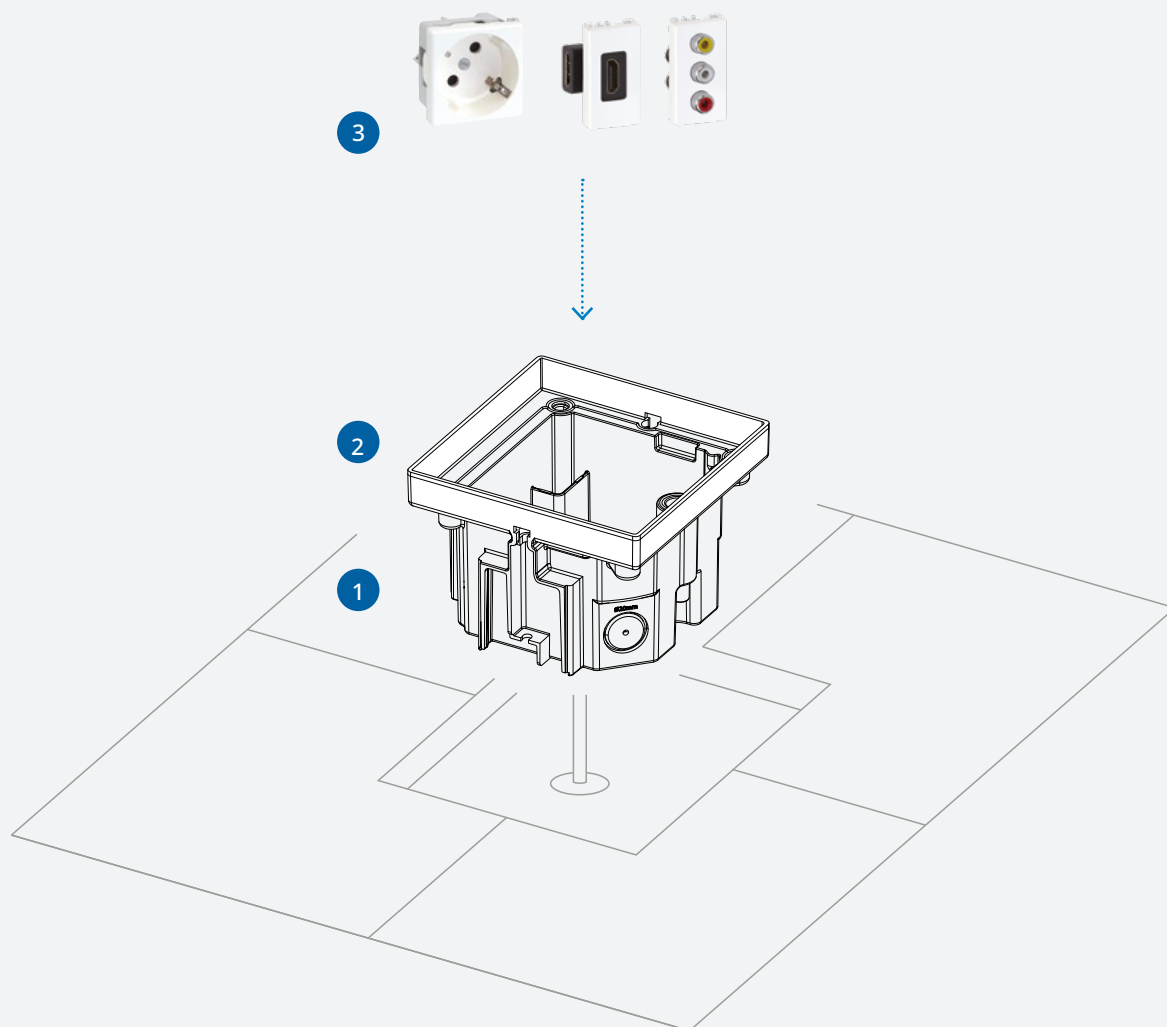

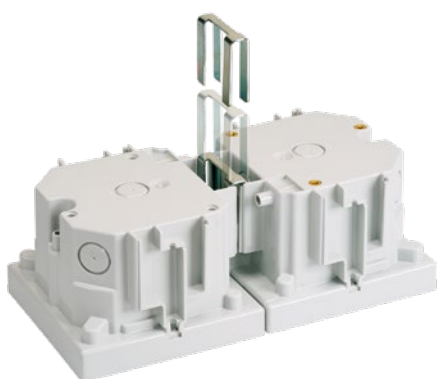

/ ALL MATERIAL INCLUDED

The screed box is supplied with the components necessary to install the product correctly (drainage tube, watertight cones, screws and dowels, protective cover, installation manual...)


/ EASY TO EXPAND

Option to join screed boxes on 3 of their 4 sides to offer more connection points. (Example of 2 floor screed boxes joined together.)



/ OPTIMAL DATA TRANSMISSION

The depth of the screed box is 84 mm between the slab floor and the floor covering to allow optimal data transmission for high-speed connections.

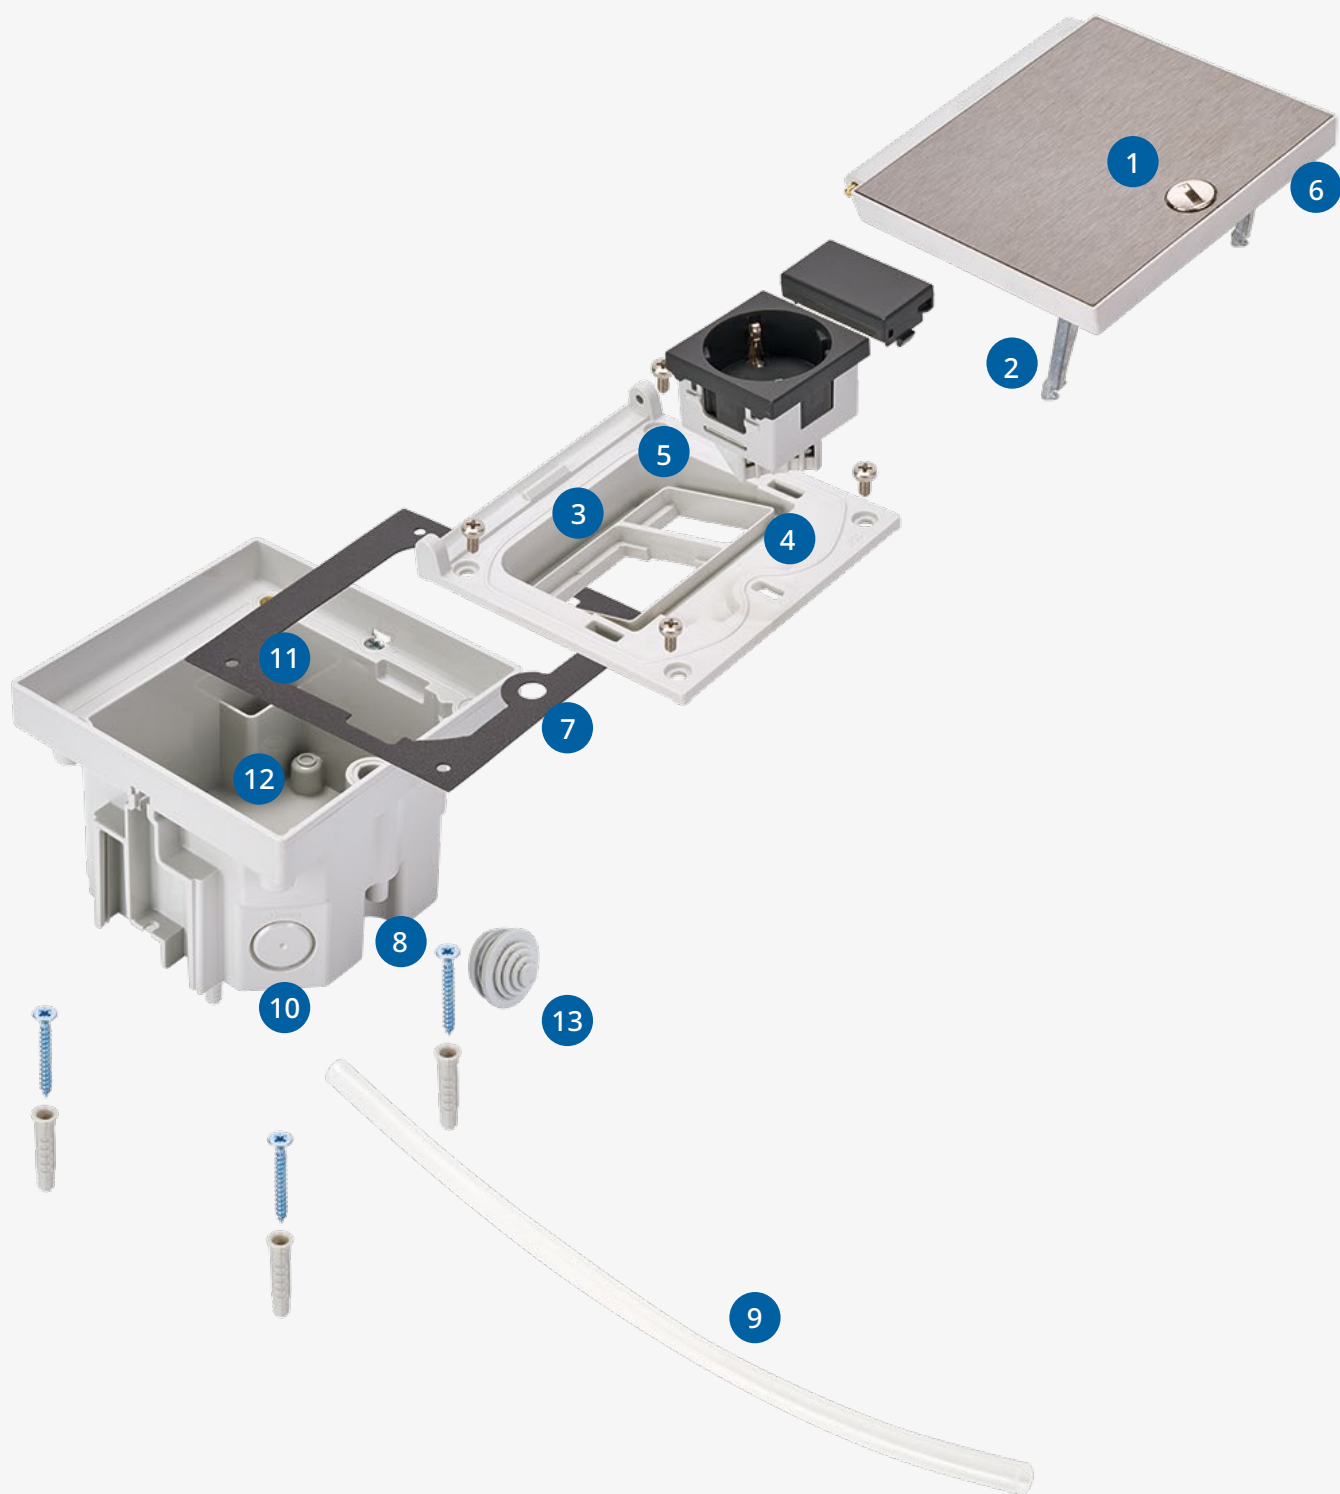

INSTALLATION SYSTEM

FLUSH-MOUNT IN THE FLOOR

1 / Manual and protected opening system:

Suitable for any setting, private or public.

2 / Metal support fastening:

Making the assembly stronger and more resistant.

3 / More space inside for plugs housing:

Allowing the installation of straight and angled plugs, protecting them from breakage or wear through use.

4 / Protective barrier to stop liquids entering:

The functions in the box are isolated from contact with liquid by the protective barrier that covers the perimeter of the functions.

5 / Surface of a sloping indoor floor:

Drain any liquid that might have entered inside the box into the channel on the upper area to prevent the liquid remaining in the zone.

6 / Upper watertight sealing gasket:

Guarantees IP66 grade protection when the box cover is fully closed.

7 / Lower watertight sealing gasket:

Guarantees protection grade in the joint between both components.

8 / Liquid drainage system:

The screed box includes a drainage system to expel liquid from the interior that has entered inside the box.

9 / Silicon tube connected to the sump:

The screed box includes a silicon tube that connects to the drainage system to expel liquid to the sump.

10 / Access for wiring:

The screed box has 3 openings of 20 mm and 1 opening which is 22 mm in diameter through a corrugated tube.

11 / Deposit for accumulating liquid:

The screed box includes a deposit to keep the liquid away from the live areas.

12 / Accessories for aligning the screed box with the floor:

The design includes tabs for the accessory to enable a perfect flush finish between the screed box and the slab floor.



13 / With all the necessary material:

It is supplied with the components necessary for a perfect installation (screws, cones, protective wood, liquid drainage tube...).



Watertight floor box

SCREED BOXES

INSTALLATION IN RAISED FLOORS (FOR 1 X K45 FUNCTION)

|  | REFERENCE | FINISH | DESCRIPTION |
|---|-----------------|--------|---|
| | KGT100RF | /72 | Watertight screed box for 1 x 45 mm K45 function to fit into a raised floor with a stainless steel frame. |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT100RF | /74 | Watertight screed box for 1 x 45 mm K45 function to fit into a raised floor with a black frame. |



INSTALLATION IN RAISED FLOORS (FOR 2 X K45 FUNCTIONS)

|  | REFERENCE | FINISH | DESCRIPTION |
|---|-----------------|--------|--|
| | KGT200RF | /72 | Watertight screed box for 2 x 45 mm K45 functions to fit into a raised floor with a stainless steel frame. |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT200RF | /74 | Watertight screed box for 2 x 45 mm K45 functions to fit into a raised floor with a black frame. |

INSTALLATION IN PAVEMENT (FOR 1 X K45 FUNCTION)







| | | | |
|---|----------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT100 | /72 | Watertight screed box for 1 x 45 mm K45 function to fit into pavement, grey. |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT100 | /74 | Watertight screed box for 1 x 45 mm K45 function to fit into pavement, black. |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFA1002 | | Accessory for joining K45 watertight screed boxes in paved floors |


INSTALLATION IN PAVEMENT (FOR 2 X K45 FUNCTIONS)


| | | | |
|---|---------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT200 | /72 | Watertight screed box for 2 x 45 mm K45 functions to fit into pavement, grey. |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGT200 | /74 | Watertight screed box for 2 x 45 mm K45 functions to fit into pavement, black. |


FUNCTION-HOLDER UNIT WITH SCHUKO SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES


WITH SAFETY LOCK (FOR 1 X K45 FUNCTION)

| | | | |
|---|-------------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH110SEC | /72 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH110SEC | /74 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH116USEC | /72 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH116USEC | /74 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH115USEC | /72 | With a schuko socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH115USEC | /74 | With a schuko socket-outlet and a category 5e UTP RJ45 data connector, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH FRENCH-BELGIAN SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES

WITH SAFETY LOCK (FOR 1 X K45 FUNCTION)



| REFERENCE | FINISH | DESCRIPTION |
|------------------|------------|---|
| KFH120SEC | /72 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|------------------|------------|---|
| KFH120SEC | /74 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |



| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|---|
| KFH126USEC | /72 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |




| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|---|
| KFH126USEC | /74 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, black |





| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|--|
| KFH125USEC | /72 | With a French-Belgian socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |




| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|--|
| KFH125USEC | /74 | With a French-Belgian socket-outlet and a category 5e UTP RJ45 data connector, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 772 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |







|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 774 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 772 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 774 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH P40 ITALIAN SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES

CON CIERRE DE SEGURIDAD (PARA 1 FUNCIÓN K45)

| | | | |
|---|-------------------|------------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH130SEC | /72 | With a P40 Italian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH130SEC | /74 | With a P40 Italian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH136USEC | /72 | With a P40 Italian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH136USEC | /74 | With a P40 Italian socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH135USEC | /72 | With a P40 Italian socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH135USEC | /74 | With a P40 Italian socket-outlet and a category 5e UTP RJ45 data connector, black 20 Watertight |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |



| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |



| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |









| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |





FUNCTION-HOLDER UNIT WITH BS-1363 BRITISH SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES


WITH SAFETY LOCK (FOR 1 X K45 FUNCTION)

| | | | |
|---|-------------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH140SEC | /72 | With a BS-1363 British socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH140SEC | /74 | With a BS-1363 British socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH146USEC | /72 | With a BS-1363 British socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH146USEC | /74 | With a BS-1363 British socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH145USEC | /72 | With a BS-1363 British socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH145USEC | /74 | With a BS-1363 British socket-outlet and a category 5e UTP RJ45 data connector, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 772 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH101SEC | 774 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 772 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|--|
| | KFH100SEC | 774 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH SCHUKO SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES

WITH MANUAL LOCK (FOR 1 X K45 FUNCTION)



| REFERENCE | FINISH | DESCRIPTION |
|---------------|------------|---|
| KFH110 | /72 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|---------------|------------|---|
| KFH110 | /74 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |



| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|---|
| KFH116U | /72 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|---|
| KFH116U | /74 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, black |




| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|--|
| KFH115U | /72 | With a schuko socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |





| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|--|
| KFH115U | /74 | With a schuko socket-outlet and a category 5e UTP RJ45 data connector, black |


|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH111 | /72 | With a schuko socket-outlet and a housing for a data/multimedia connection with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH111 | /74 | With a schuko socket-outlet and a housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | /72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |







|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | /74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|---|---------------|--------|--|
| | KFH100 | /72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH100 | /74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH FRENCH-BELGIAN SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES


WITH MANUAL LOCK (FOR 1 X K45 FUNCTION)


| | | | |
|---|----------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH120 | /72 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH120 | /74 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH126U | /72 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH126U | /74 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH125U | /72 | With a French-Belgian socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH125U | /74 | With a French-Belgian socket-outlet and a category 5e UTP RJ45 data connector, black |


|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH121 | /72 | With a French-Belgian base and a housing for a data/multimedia connection with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH121 | /74 | With a French-Belgian base and a housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | /72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | /74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|---|---------------|--------|--|
| | KFH100 | /72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH100 | /74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH ITALIAN P40 SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES

WITH MANUAL LOCK (FOR 1 X K45 FUNCTION)



| REFERENCE | FINISH | DESCRIPTION |
|---------------|------------|--|
| KFH130 | /72 | With a P40 Italian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|---------------|------------|--|
| KFH130 | /74 | With a P40 Italian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |



| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|--|
| KFH136U | /72 | With a P40 Italian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|--|
| KFH136U | /74 | With a P40 Italian socket-outlet and a category 6 UTP RJ45 data connector, black |








| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|---|
| KFH135U | /72 | With a P40 Italian socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|----------------|------------|---|
| KFH135U | /74 | With a P40 Italian socket-outlet and a category 5e UTP RJ45 data connector, black |









| REFERENCE | FINISH | DESCRIPTION |
|---------------|------------|--|
| KFH131 | /72 | With an P40 Italian socket-outlet and a housing for a data/multimedia connection with Keystone snap-fit, stainless steel |


| | | | |
|---|---------------|------------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH131 | /74 | With an P40 Italian socket-outlet and a housing for a data/multimedia connection with Keystone snap-fit, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH101 | /72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH101 | /74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH100 | /72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH100 | /74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |


FUNCTION-HOLDER UNIT WITH BS-1363 BRITISH SOCKET-OUTLET COMPATIBLE WITH BOTH SCREED BOXES


WITH MANUAL LOCK (FOR 1 X K45 FUNCTION)

| | | | |
|---|----------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH140 | /72 | With a BS-1363 British socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH140 | /74 | With a BS-1363 British socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH146U | /72 | With a BS-1363 British socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH146U | /74 | With a BS-1363 British socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH145U | /72 | With a BS-1363 British socket-outlet and a category 5e UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH145U | /74 | With a BS-1363 British socket-outlet and a category 5e UTP RJ45 data connector, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | 72 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, stainless steel |







|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH101 | 74 | With a 45 mm housing for customised K45 functions and housing for a data/multimedia connection with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH100 | 72 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|--|
| | KFH100 | 74 | With a 45 mm housing and a 22.5 mm blind plate for customised K45 functions, black |


FUNCTION-HOLDER UNIT WITH SCHUKO SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES


WITH SAFETY LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|-------------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH210SEC | /72 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH210SEC | /74 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH216USEC | /72 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH216USEC | /74 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH215USEC | /72 | With two schuko socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH215USEC | /74 | With two schuko socket-outlets and two category 5e UTP RJ45 data connectors, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH FRENCH-BELGIAN SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES

WITH SAFETY LOCK (FOR 2 X K45 FUNCTIONS)



| REFERENCE | FINISH | DESCRIPTION |
|------------------|------------|--|
| KFH220SEC | /72 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|------------------|------------|--|
| KFH220SEC | /74 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |



| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|---|
| KFH226USEC | /72 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|---|
| KFH226USEC | /74 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, black |




| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|--|
| KFH225USEC | /72 | With two French-Belgian socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |




| REFERENCE | FINISH | DESCRIPTION |
|-------------------|------------|--|
| KFH225USEC | /74 | With two French-Belgian socket-outlets and two category 5e UTP RJ45 data connectors, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |







|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH P40 ITALIAN SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES

WITH SAFETY LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|-------------------|------------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH230SEC | /72 | With two P40 Italian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH230SEC | /74 | With two P40 Italian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH236USEC | /72 | With two P40 Italian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH236USEC | /74 | With two P40 Italian socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH235USEC | /72 | With two P40 Italian socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH235USEC | /74 | With two P40 Italian socket-outlets and two category 5e UTP RJ45 data connectors, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |







| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |


FUNCTION-HOLDER UNIT WITH BS-1363 BRITISH SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES


WITH SAFETY LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|-------------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH240SEC | /72 | With two BS-1363 British socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH240SEC | /74 | With two BS-1363 British socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH246USEC | /72 | With two BS-1363 British socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH246USEC | /74 | With two BS-1363 British socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH245USEC | /72 | With two BS-1363 British socket-outlets and two category e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH245USEC | /74 | With two BS-1363 British socket-outlets and two category 5e UTP RJ45 data connectors, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 772 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |







|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH201SEC | 774 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 772 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KFH200SEC | 774 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH SCHUKO SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES

WITH MANUAL LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|----------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH210 | /72 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH210 | /74 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH216U | /72 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH216U | /74 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH215U | /72 | With two schuko socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH215U | /74 | With two schuko socket-outlets and two category 5e UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH211 | /72 | With two schuko socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH211 | /74 | With two schuko socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |








| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |


FUNCTION-HOLDER UNIT WITH FRENCH-BELGIAN SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES


WITH MANUAL LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|----------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH220 | /72 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH220 | /74 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH226U | /72 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH226U | /74 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH225U | /72 | With two French-Belgian socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH225U | /74 | With two French-Belgian socket-outlets and two category 5e UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH221 | /72 | With two French-Belgian socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH221 | /74 | With two French-Belgian socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, black |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | /72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |









|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | /74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |





|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | /72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | /74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH P40 ITALIAN SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES







WITH MANUAL LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|----------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH230 | /72 | With two P40 Italian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH230 | /74 | With two P40 Italian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH236U | /72 | With two P40 Italian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH236U | /74 | With two P40 Italian socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH235U | /72 | With two P40 Italian socket-outlets and two category 5e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH235U | /74 | With two P40 Italian socket-outlets and two category 5e UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH231 | /72 | With two P40 Italian socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH231 | /74 | With two P40 Italian socket-outlets and two housings for data/multimedia connectors with Keystone snap-fit, black |

| | | | |
|--|---------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH201 | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH201 | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH200 | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH200 | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

FUNCTION-HOLDER UNIT WITH BS-1363 BRITISH SOCKET-OUTLETS COMPATIBLE WITH BOTH SCREED BOXES

WITH MANUAL LOCK (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|----------------|--------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH240 | /72 | With two BS-1363 British socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH240 | /74 | With two BS-1363 British socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH246U | /72 | With two BS-1363 British socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH246U | /74 | With two BS-1363 British socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH245U | /72 | With two BS-1363 British socket-outlets and two category e UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFH245U | /74 | With two BS-1363 Italian socket-outlets and two category 5e UTP RJ45 data connectors, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | 72 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH201 | 74 | With two 45 mm housings for customised K45 functions and two housings for data/multimedia connections with Keystone snap-fit, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | 72 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|---------------|--------|---|
| | KFH200 | 74 | With two 45 mm housings and a 22.5 mm blind plate for customised K45 functions, black |

ACCESSORIES

FOR 1X K45 FUNCTION REFERENCE FINISH

| | REFERENCE | FINISH | DESCRIPTION |
|-------------|----------------|--------|--|
| COMING SOON | KFA1001 | /72 | IP54 protection grade with power and data patch-cords plugged to the box with the lid closed |
| | | | |



| | REFERENCE | FINISH | DESCRIPTION |
|--|----------------|--------|---|
| | KFA1002 | | Group K45 watertight screed boxes in paved floors |




| | REFERENCE | FINISH | DESCRIPTION |
|--|----------------|--------|--|
| | KFA1003 | | Leveling/Align with slab floor K45 watertight screed boxes in paved floors |

FOR 2 X K45 FUNCTIONS

| | REFERENCE | FINISH | DESCRIPTION |
|-------------|----------------|--------|--|
| COMING SOON | KFA2001 | /72 | IP54 protection grade with power and data patch-cords plugged to the box with the lid closed |
| | | | |

SPARE PARTS (FOR 1X K45 FUNCTION)

| | REFERENCE | FINISH | DESCRIPTION |
|---|----------------|--------|---|
|  | KFS1001 | /72 | Hinged lid for IP66 watertight floor box, stainless steel |
| | | | |



| | REFERENCE | FINISH | DESCRIPTION |
|--|----------------|--------|---|
| | KFS1001 | /74 | Hinged lid for IP66 watertight floor box, black |







| | REFERENCE | FINISH | DESCRIPTION |
|--|----------------|--------|--|
| | KFS1002 | | Square watertight sealing gasket for joining screed box and function-holder unit |








| | REFERENCE | FINISH | DESCRIPTION |
|--|----------------|--------|---|
| | KFS1003 | | Circular watertight sealing gasket for hinged lid |

SPARE PARTS (FOR 2 X K45 FUNCTIONS)

| | | | |
|--|----------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFS2001 | /72 | Hinged lid for IP66 watertight floor box, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFS2001 | /74 | Hinged lid for IP66 watertight floor box, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFS2002 | | Square watertight sealing gasket for joining screed box and function-holder unit |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KFS2003 | | Circular watertight sealing gasket for hinged lid |

FLOOR KITS WITH SCHUKO AND FRENCH-BELGIAN SOCKET-OUTLETS

WITH MANUAL LOCK INSTALLATION IN RAISED FLOOR (FOR 1 X K45 FUNCTION)

| | | | |
|---|------------------|------------|---|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH110RF | /72 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH110RF | /74 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH116URF | /72 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH116URF | /74 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH120RF | /72 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH120RF | /74 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH126URF | /74 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH126URF | /74 | With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|---|
| | KGH100RF | 772 | With a 45 mm housing for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|---|
| | KGH100RF | 774 | With a 45 mm housing for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, black |

WITH MANUAL LOCK INSTALLATION IN RAISED FLOOR (FOR 2 X K45 FUNCTIONS)

| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|--|
| | KGH210RF | 772 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|--|
| | KGH210RF | 774 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |




| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KGH216URF | 772 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KGH216URF | 774 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, black |






| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|--|
| | KGH220RF | 772 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |






| | REFERENCE | FINISH | DESCRIPTION |
|--|-----------------|--------|--|
| | KGH220RF | 774 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |

| | REFERENCE | FINISH | DESCRIPTION |
|--|------------------|--------|---|
| | KGH226URF | 772 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |

|  | REFERENCE | FINISH | DESCRIPTION |
|---|------------------|------------|--|
| | KGH226URF | /74 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH200RF | /72 | With two 45 mm housings for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH200RF | /74 | With two 45 mm housings for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, black |

WITH MANUAL LOCK INSTALLATION IN PAVEMENT (FOR 1 X K45 FUNCTION)

|  | REFERENCE | FINISH | DESCRIPTION |
|---|------------------|------------|---|
| | KGH110CF | /72 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH110CF | /74 | With a schuko socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH116UCF | /72 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH116UCF | /74 | With a schuko socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH120CF | /72 | With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, stainless steel |

| | | | |
|--|-------------------------------|----------------------|--|
|  | REFERENCE KGH120CF | FINISH /74 | DESCRIPTION With a French-Belgian socket-outlet and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE KGH126UCF | FINISH /72 | DESCRIPTION With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, stainless steel |
|  | REFERENCE KGH126UCF | FINISH /74 | DESCRIPTION With a French-Belgian socket-outlet and a category 6 UTP RJ45 data connector, black |
|  | REFERENCE KGH100CF | FINISH /72 | DESCRIPTION With a 45 mm housing for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE KGH100CF | FINISH /74 | DESCRIPTION With a 45 mm housing for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, black |

WITH MANUAL LOCK INSTALLATION IN PAVEMENT (FOR 2 X K45 FUNCTIONS)

| | | | |
|---|------------------|--------|--|
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH210CF | /72 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH210CF | /74 | With two schuko socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH216UCF | /72 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH216UCF | /74 | With two schuko socket-outlets and two category 6 UTP RJ45 data connectors, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH220CF | /72 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH220CF | /74 | With two French-Belgian socket-outlets and a 22.5 mm blind plate for customised K45 functions, black |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH226UCF | /72 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, stainless steel |
|  | REFERENCE | FINISH | DESCRIPTION |
| | KGH226UCF | /74 | With two French-Belgian socket-outlets and two category 6 UTP RJ45 data connectors, black |



| REFERENCE | FINISH | DESCRIPTION |
|-----------------|--------|--|
| KGH200CF | 72 | With two 45 mm housings for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, stainless steel |



| REFERENCE | FINISH | DESCRIPTION |
|-----------------|--------|--|
| KGH200CF | 74 | With two 45 mm housings for customised K45 functions and a 22.5 mm blind plate for customised K45 functions, black |

COMPLEMENTS FOR INSTALLATION



| REFERENCE | FINISH | DESCRIPTION |
|------------|------------------|---|
| K11 | /9 /6 /14 | Schuko socket-outlet with quick terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|------------------|---|
| K22 | /9 /6 /14 | French-Belgian socket-outlet with quick terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|---------------|--|
| K04 | /9 /14 | BS-1363 British socket-outlet with screw terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|---------------|--|
| K08 | /9 /14 | Swiss socket-outlet with screw terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|---------------|---|
| K15 | /9 /14 | Danish socket-outlet with screw terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|---------------|--|
| K03 | /9 /14 | Israeli socket-outlet with screw terminal connection |



| REFERENCE | FINISH | DESCRIPTION |
|------------|---------------|--|
| K07 | /9 /14 | South African socket-outlet with screw terminal connection |



QuickCharge

| REFERENCE | FINISH | DESCRIPTION |
|--------------|-----------|---|
| K126F | /9 /14 /8 | USB charger type A+C 18W with QuickCharge |
| K126E | /9 /14 /8 | USB charger double type A 2.1A |



| REFERENCE | FINISH | DESCRIPTION |
|--------------|-----------|---|
| K106A | /9 /14 /8 | Miniature circuit breaker 10A with trim plate |
| K107A | /9 /14 /8 | Residual current circuit breaker 10A with 10mA sensitivity and trim plate |




| REFERENCE | FINISH | DESCRIPTION |
|------------|-----------|---|
| K76 | /9 /14 /8 | Voice and data flat plate with dust cover for 1 RJ45 connector with Keystone / Systimax® snap-fit |



EXAMPLE OF CONFIGURATION



+



+



| QUANTITY | REFERENCE | FINISH | DESCRIPTION |
|----------|---------------|--------|---|
| 1 | KGT200 | /72 | Watertight screed box for 2 x 45 mm K45 functions to fit into pavement, grey. |
| 1 | KFH200 | /72 | Unit for 2 x 45 mm housings and 22.5 mm blind plate, stainless steel |
| 2 | K11 | /9 | Schuko socket-outlet with quick terminal connection, white |

Technical information

IP66 K45 WATERTIGHT FLOOR BOXES

- Product design in accordance with the Safety Requirements of Directive 2006/95/CE (Low Voltage) through compliance with UNE-EN standard 60.670.
- CE marked product
- The temperature range for installation is from: -25°C to + 60°C
- The maximum temperature during construction work is + 90°C

CLOSED BOX

- IP66 Protection Grade
- IK08 Impact Protection Grade
- Maximum weight per area unit: 12 kg/cm²
- Maximum total weight:
 - 1 module box 1,500 kg
 - 2 module box 2,000 kg

OPEN BOX



- IP20 Protection Grade (IP54 with accessory)
- IK07 Impact Protection Grade
- Maximum weight per area unit: 4 kg/cm²
- Maximum total weight:
 - 1 module box 250 kg
 - 2 module box 250 kg

SCREED BOXES FOR 1X K45 FUNCTION

SCREED BOX FOR RAISED FLOOR

INSTALLATION IN RAISED FLOOR



KGT100RF  



SCREED BOX FOR PAVEMENT FLOOR

INSTALLATION IN PAVEMENT FLOOR

KGT100  





SCREED BOXES FOR 2 X K45 FUNCTIONS

SCREED BOX FOR RAISED FLOOR

INSTALLATION IN RAISED FLOOR



KGT200RF  



PAVEMENT SCREED BOX

INSTALLATION IN PAVEMENT FLOOR

KGT200  




ACCESSORIES FOR JOINTS


ACCESSORIES FOR LEVELLING

ACCESSORIES FOR PROTECTION

KFA1002



KFA1003



KFA1001

KFA2001

COMING SOON

SPARE PARTS

KFS1001/..







KFS2001/..

KFS1002

KFS2002

KFS1003

KFS2003





www.simonelectric.com



SIMON, S.A.U

Sancho de Ávila, 66
08018 Barcelona
Tel.(+34) 630 72 24 65

Customer Service

Tel. (+34)651 761 314 /
(+34) 651 761 328
customerservice@simon.es

Technical Support (SAT)

Tel. (+34) 651 761 346
sat@simon.es

Visit us at:

La Casa de la Luz

Santa Cruz de Marcenado, 1
28015 Madrid
by appointment:
lacasadelaluz@simonelectric.com

La Casa de la Llum

Sancho de Ávila, 66
08018 Barcelona
Tel. (+34) 630 927 001
lacasadelallum@simonelectric.com