

ToLEDo Superia T5 ECG

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840

0029269

Product features

- 50,000 hours average rated lifetime
- Last 2.5 times longer than 49W 1449mm fluorescent tri-phosphor T5 lamp
- High switching cycles - 200,000X
- High lumen efficacy
- Omni-directional light distribution and wide beam angle
- Minimum and maximum operating temperature: -20°C to 50°C
- Glass construction and polycarbonate end-caps
- Not suitable for direct mains (AC 220-240V) or magnetic/ CCG ballast
- Works only with compatible electronic ballasts
- Ideal for factories, parking lots, supermarkets, department stores, schools and offices



PRODUCT OVERVIEW

Product name	ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840
Technology	LED
Watt (Rated) (W)	26
Lamp shape	Tube, double-ended
Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4940792
Warranty	5 years
Luminous flux (lm)	3900
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Wattage (W)	26
Dimmable	No
Average life (Nominal) (h)	50000
IP rating	IP20
Product EAN number	5410288292694

DATA TABLE

General data

Product name	ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840
Technology	LED
Watt (Rated) (W)	26
Lamp shape	Tube, double-ended

ToLEDo Superia T5 ECG

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840

0029269

Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4940792
Warranty	5 years

Optical data

Luminous flux (lm)	3900
Luminous flux (Rated) (lm)	3900
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	26
Primary Supply/Product voltage - min (V)	110
Primary Supply/Product voltage - max (V)	110
Ignition voltage (V)	80
Control gear required	Yes
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	35.2
Inrush Duration (µs)	421
Lamp Energy Label (class)	D
Max. products per 16A C Breaker	34
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	46
Max. products per 16A B Breaker	56

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

IP rating	IP20
-----------	------

ToLEDo Superia T5 ECG

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840
0029269

Nominal Product Length (mm)	1462
Nominal Product Diameter (mm)	17
Weight (kg)	0.17


Packaging

Single packaging type	Carton
Product EAN number	5410288292694
Packaging single length / height (cm)	146.2
Packaging single width (cm)	1.8
Packaging single depth (cm)	1.8
DUN14 (outer)	15410288292691
Units per outer package	10
Packaging outer length / height (cm)	152.1
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	7.8


Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	None

PHOTOMETRY

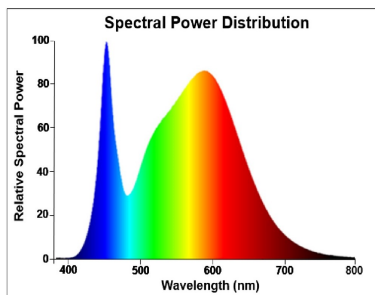

TECHNICAL DRAWINGS



SYLVANIA


ToLEDo Superia T5 ECG

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840
0029269



SYLVANIA

0029269

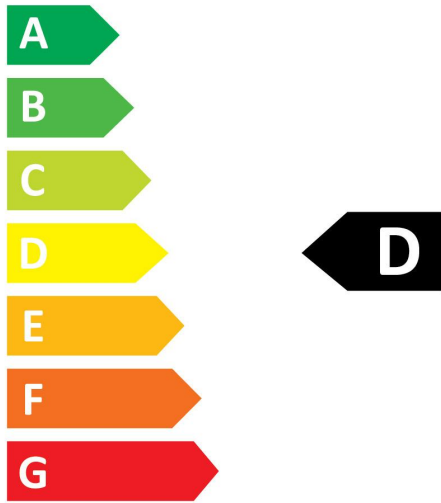

26
kWh/1000h



2019/2015


SYLVANIA

ToLEDo Superia T5 ECG

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840
0029269



0029269

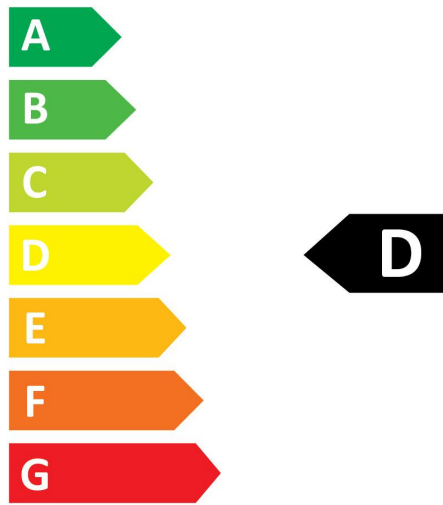

26
kWh/1000h



2019/2015