

ToLEDo SUPERIA T8 CCG L1500 4100LM 840 75K PET SL

Item No: 0030249


SYLVANIA



Technical Assets

Dimensions (mm)

Photometrics

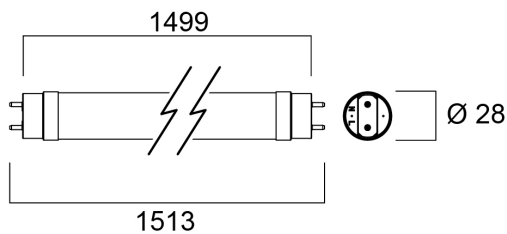

ToLEDo SUPERIA T8 CCG L1500 4100LM 840 75K PET SL

Item No: 0030249



General data

Product name	ToLEDo SUPERIA T8 CCG L1500 4100LM 840 75K PET SL
Technology	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
ETIM Class	EC001959
E-number FI	4941354
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	4100
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0

Electrical data

Power consumption (W)	22.2
Wattage (W)	22.2
Current (A)	0.1
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Control gear required	No
Control gear type	LED driver constant current
Dimming method	N/A
Inrush Current (A)	16.2
Inrush Duration (μ s)	50
Lamp Energy Label (class)	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	140
Max. products per 13A C Breaker	190
Max. products per 16A C Breaker	230
Max. products per 20A C Breaker	290
Max. products per 20A B Breaker	175

Lifetime data

Lifespan L70 B50	75000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
Nominal Product Length (mm)	1499
Nominal Product Diameter (mm)	28
Weight (kg)	0.26

Packaging

Product EAN number	5410288302492
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288302499
Packaging outer length / height (cm)	161.0

ToLED_o SUPERIA T8 CCG L1500 4100LM 840 75K PET SL

Item No: 0030249

SYLVANIA

Safety data

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Safety message	Suitable for totally enclosed fixture