


## Walraven RapidStrut® Connector 90° (BUP1000)

(H2813)

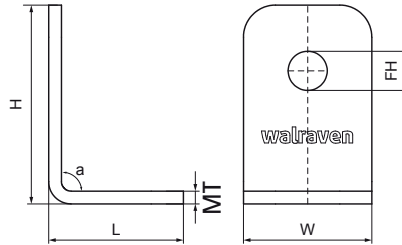

### Features & benefits

- angle connector for all Walraven RapidStrut® rails to make fabrications
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- user friendly by rounded edges
- with reinforced bend for extra strength
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Productnumber    | For Rail Type                     | Model | Angle    | Material Thickness | Heart To Heart Distance | Torque Moment For Installation |
|------------------|-----------------------------------|-------|----------|--------------------|-------------------------|--------------------------------|
| Reference Letter |                                   |       | $\alpha$ | MT                 | k                       | T <sub>inst</sub>              |
| Unit description |                                   |       | °        | mm                 | mm                      | Nm                             |
| 66588201         | 41x21, 41x41, 41x51, 41x62, 41x82 | S/S   | 90       | 4.00               |                         | 30                             |
| 66588207         | 41x21, 41x41, 41x51, 41x62, 41x82 | S/S   | 90       | 4.00               |                         | 30                             |
| 66588221         | 41x21, 41x41, 41x51, 41x62, 41x82 | L/S   | 90       | 4.00               | 50                      | 30                             |
| 66588228         | 41x21, 41x41, 41x51, 41x62, 41x82 | L/L   | 90       | 4.00               | 50                      | 30                             |