


Concord

OPTIX RECESSED 600x600 2L 4000K C9 ALU

2023579

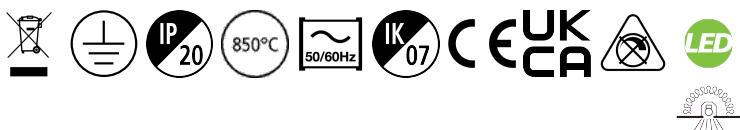

Features

- OPTIX RECESSED 600x600 2L 4000K C9 ALU is a high efficacy low glare luminaire for office and education applications with excellent colour rendering. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3550lm. Power consumption 30W. Luminaire efficacy 118lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Product Overview

Product name	OPTIX RECESSED 600x600 2L 4000K C9 ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3550
Luminous flux (lm)	3550
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1

Concord
by SYLVANIA


Concord

OPTIX RECESSED 600x600 2L 4000K C9 ALU

2023579

Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768235797
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3550

Photometry

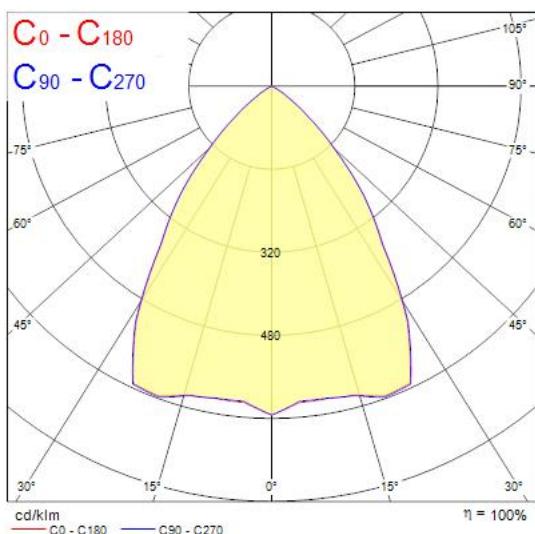

Technical drawings

