


Walraven Bifix® 1301 Stainless Steel (M8)

(M0505)

for stainless steel and plastic pipes

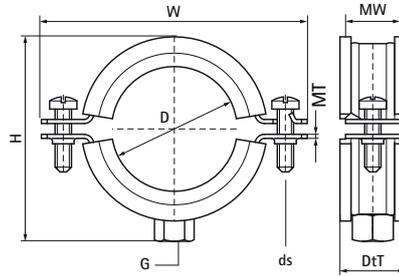

Features & benefits

- two-screw clamp
- with quick locking system
- material: stainless steel 1.4404 (AISI 316L)
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description			"		mm	mm	mm	mm	mm		N	
3117015		DN 8	1/4	M8	33	58	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117018	018016118	DN 10	3/8	M8	37	62	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117023	018016123	DN 15	1/2	M8	41	64	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117029	018016129	DN 20	3/4	M8	47	70	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117035	018016135	DN 25	1	M8	54	78	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117043	018016143	DN 32	1 1/4	M8	61	85	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117049	018016151	DN 40	1 1/2	M8	70	97	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117056	018016156	-	-	M8	75	97	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117063	018016161	DN 50	2	M8	80	102	25	20	1.25	M6	900	RAL-GZ 655/B, ITB (KOT), EPD
3117067	018016162	-	-	M8	87	109	25	20	2.00	M6	1,350	RAL-GZ 655/B, ITB (KOT), EPD
3117076	018016163	DN 65	2 1/2	M8	96	118	25	20	2.00	M6	1,350	RAL-GZ 655/B, ITB (KOT), EPD
3117091	018016166	DN 80	3	M8	108	130	25	20	2.00	M6	1,350	RAL-GZ 655/B, ITB (KOT), EPD
3117106	018016170	-	-	M8	132	154	25	20	2.50	M6	1,350	RAL-GZ 655/B, ITB (KOT), EPD
3117116	018016175	DN 100	4	M8	136	158	25	20	2.50	M6	1,710	RAL-GZ 655/B, ITB (KOT), EPD