


Data Sheet | Item Number: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

<https://www.wago.com/210-198>



Color: ■ copper-colored

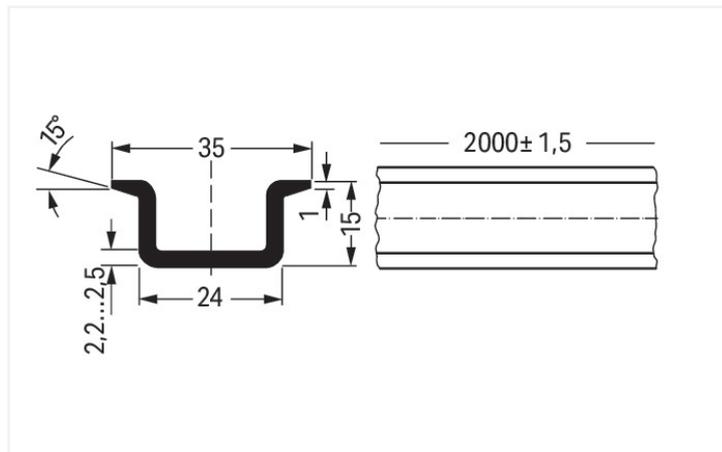

Dimensions in mm

Physical data

Width	2000 mm / 78.74 inches
Height	15 mm / 0.591 inches
Depth	35 mm / 1.378 inches

Material data

Color	copper-colored
Fire load	0 MJ
Weight	2075 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332277167
Customs tariff number	7407100000

Product Classification

UNSPSC	39121702
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 9.0	EC001285
ETIM 8.0	EC001285
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 210-198	↓

Documentation

Bid Text			
210-198	19.02.2019	xml 2.64 KB	↓
210-198	31.08.2017	doc 24.00 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 210-198	↓

CAE data	
EPLAN Data Portal 210-198	↓
WSCAD Universe 210-198	↓
ZUKEN Portal 210-198	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



[Item No.: 209-137](#)
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



[Item No.: 249-117](#)
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[Item No.: 249-197](#)
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[Item No.: 249-116](#)
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Marking

1.1.2.1 Label



Item No.: 210-808

Labels; for Smart Printer; 9.5 x 25 mm; white



Item No.: 210-708

Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).