

# Concord

## MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ 2056263



### Features

- The Myriad Adjustable Twin recessed spotlight is a high efficient accent downlight with double head lights, fixture color RAL 9005 - Jet black, correlated colour temperature of 4000K, color rendering index Ra140, fixture lumen 684 x 2lm, total power consumption 20W, luminaire efficacy 68 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 193mm, width 90mm, height 115mm, cut-out dimension 176x72mm, IP rating IP20, 5 years warranty.

### Product Overview

Product name	MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Indoor
Fixture luminous flux (lm)	684 x 2
Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear mounting	Remote
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02

# Concord

## MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ 2056263


Product EAN number

5025768562633

Warranty

5 years

### Technical drawings

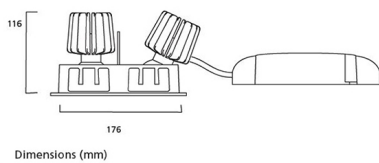

Dimensions (mm)

### Data table

#### GENERAL DATA

Product name	MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Indoor
Performance ambient temperature Tq (°C)	25
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	684 x 2
Luminaire efficacy (lm/W)	68

# Concord

## MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ 2056263

LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear mounting	Remote
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### PHYSICAL DATA

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	193
Nominal Product Width (mm)	90
Weight (kg)	0.65
Recessed Depth (mm)	115

# Concord

MYRIAD ADJ TWIN BLACK 4000K PHDIM SILVER BZ  
**2056263**

## PACKAGING

Single packaging type	Carton
Product EAN number	5025768562633
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768562633
Packaging outer length / height (cm)	27.5

## SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No