



# Data Sheet | Item Number: 899-8013/000-101

Connection box; for lighting and electrical equipment; with Linect® interface; white

<https://www.wago.com/899-8013/000-101>

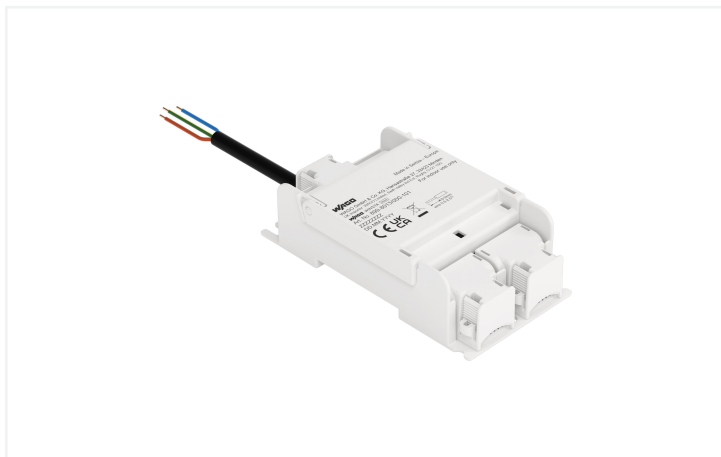

Color: ■ white

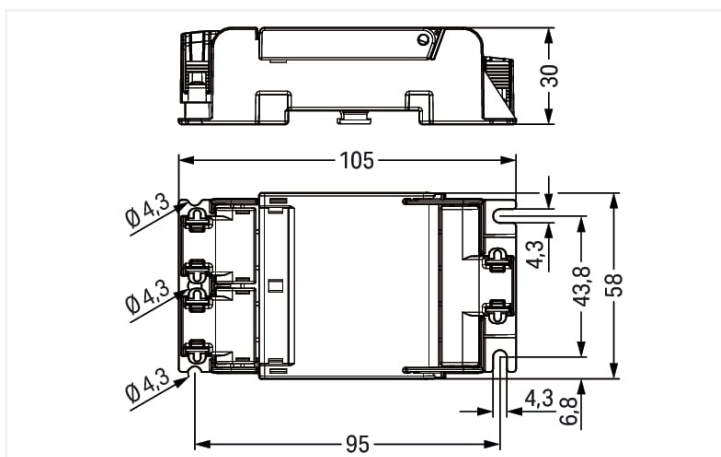

## This item includes:



### Item No.: 294-8013

Lighting connector; push-button, external; for Linect®; without ground contact; 3-pole; Cod. A; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm<sup>2</sup>; Surrounding air temperature: max 85°C (T85); 2,50 mm<sup>2</sup>; white

## Electrical data

Ratings per	IEC/EN 60998-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings per	IEC/EN 60998-2-2		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Linect® plug-in connection		
	IEC/EN 61984	IEC/EN 61984	IEC/EN 61984
Ratings per			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	16 A

### Connection data

Number of connection types	1	<b>Connection 1</b>
		Pole number
		3

### Physical data

Width	58 mm / 2.283 inches
Height	105 mm / 4.134 inches
Depth	30 mm / 1.181 inches

### Mechanical data

Marking	N L
---------	-----

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Cover color	white
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Fire load	0 MJ
Weight	60 g

### Commercial data

PU (SPU)	10 pcs
Country of origin	XS
GTIN	4066966343304
Customs tariff number	85366990990

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product  
Compliance  
899-8013/000-101



## Documentation

### Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

