


## Walraven Bifix® G2 (M8/10) (BUP1000)

(B0504)

for insulated, steel and cast iron pipes

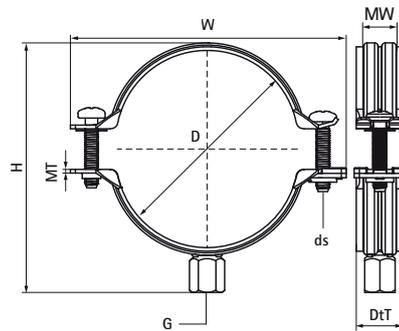

### Features & benefits

- two-screw clamp
- with quick locking system
- perfect solution for pipe supports, also for outdoor installations
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description												N
3008014	018032214	DN 8	1/4	M8/M10	36	52	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008019	018032219	DN 10	3/8	M8/M10	41	59	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008023	018032223	DN 15	1/2	M8/M10	45	63	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008028	018032228	DN 20	3/4	M8/M10	50	68	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008035	018032235	DN 25	1	M8/M10	61	74	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008039	018032239	-	-	M8/M10	66	80	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008045	018032245	DN 32	1 1/4	M8/M10	70	84	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008052	018032252	DN 40	1 1/2	M8/M10	76	91	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008058	018032258	-	-	M8/M10	83	97	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008064	018032264	DN 50	2	M8/M10	88	104	22	20	125.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008070	018032270	-	-	M8/M10	95	110	22	20	150.00	M6	1,200	RAL-GZ 655/B, CE, ETA, EPD
3008079	018032279	DN 65	2 1/2	M8/M10	107	118	22	20	15.00	M6	1,300	RAL-GZ 655/B, CE, ETA, EPD
3008083	018032283	-	-	M8/M10	108	125	22	20	15.00	M6	1,300	RAL-GZ 655/B, CE, ETA, EPD
3008091	018032291	DN 80	3	M8/M10	123	134	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008105	018032305	-	-	M8/M10	135	148	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008115	018032315	DN 100	4	M8/M10	147	155	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008130	018032330	-	-	M8/M10	164	172	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008140	018032340	DN 125	5	M8/M10	171	181	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008160	018032360	-	-	M8/M10	190	201	26	23	2.00	M6	1,800	RAL-GZ 655/B, CE, ETA, EPD
3008169	018032369	DN 150	6	M8/M10	204	217	28	25	25.00	M8	3,600	RAL-GZ 655/B, CE, ETA, EPD
3008180	018032380	-	-	M8/M10	216	229	28	25	25.00	M8	3,600	RAL-GZ 655/B, CE, ETA, EPD
3008200	018032400	-	-	M8/M10	233	248	28	25	25.00	M8	3,600	RAL-GZ 655/B, CE, ETA, EPD
3008210	018032410	-	-	M8/M10	248	261	28	25	25.00	M8	3,600	RAL-GZ 655/B, CE, ETA, EPD
3008225	018032425	DN 200	8	M8/M10	260	275	28	25	25.00	M8	3,600	RAL-GZ 655/B, CE, ETA, EPD