Data Sheet | Item Number: 734-129


Strain relief plate; for female and male connectors; 25 mm wide; 1 part; Pin spacing 3.5 mm; light gray



https://www.wago.com/734-129





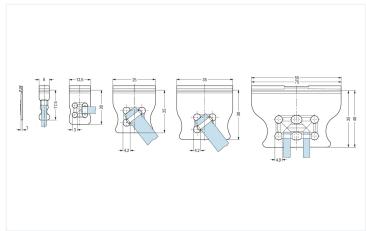

Dimensions in mm

The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

Physical data	
Width	25 mm / 0.984 inches
Height	1.87 mm / 0.074 inches
Depth	27 mm / 1.063 inches

Mechanical data	
Suitable	for standard male and female connectors (2.5 mm; 3.5 mm; 5 mm; 7.5 mm pin spacing)

Material data	
Note (material data)	
	Information on material specifications can be found here
Color	light gray
Fire load	0.019 MJ
Weight	0.8 g

Commercial data	
Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	Вох
Country of origin	DE
GTIN	4017332604536
Customs tariff number	85389099990

Data Sheet | Item Number: 734-129

https://www.wago.com/734-129



Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Approvals / Certificates

Approvals for marine applications



Approval Standard Certificate Name

LR IEC 61984 96/20035 (E5)

Lloyds Register

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product

Compliance 734-129

Documentation

Additional Information

Technical Section

03.04.2019

pdf 2010.85 KB

CAD/CAE-Data

CAD data

2D/3D Models 734-129

 \downarrow

CAE data

ZUKEN Portal 734-129

$\underline{\downarrow}$

Installation Notes

Installation



Strain relief plates for factory or in-the-field assembly

Data Sheet | Item Number: 734-129

https://www.wago.com/734-129

W/AGO

Application



Strain relief plate, for factory assembly 1-conductor female connector, 2.5 mm pin spacing, light gray, 12-pole, with strain relief plate 733-112/034-000

Application



Strain relief plate, for factory assembly 1-conductor female connector, 2.5 mm pin spacing, light gray, 2-pole, with strain relief plate (733-102/032-000)

Subject to changes. Please also observe the further product documentation!