

# Concord

## EXPOSPOT 90 DUO HE RA90 4000K NB WHITE 2070056



### Features

- Integrated LED double gimbal accent downlight, duo head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 26°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 50W, total fixture output: 2x2789lm, 112lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x292mm, dimensions: 163x307x104mm, weight: 2.1kg.

### Product Overview


Product name	EXPOSPOT 90 DUO HE RA90 4000K NB WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	2 x 2789
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class II
Control gear type	Electronic ballast

# Concord


## EXPOSPOT 90 DUO HE RA90 4000K NB WHITE 2070056

Control gear mounting	Remote
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768700561
Warranty	5 years

### Photometry

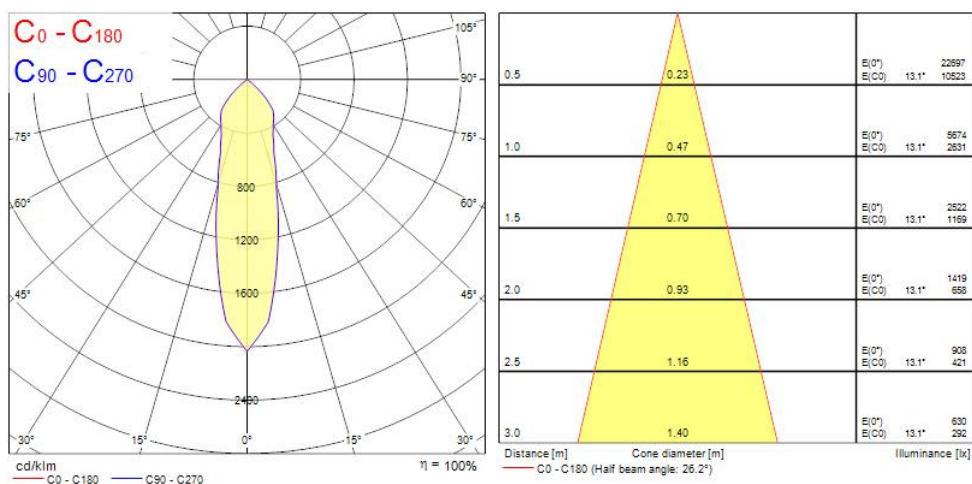

### Technical drawings

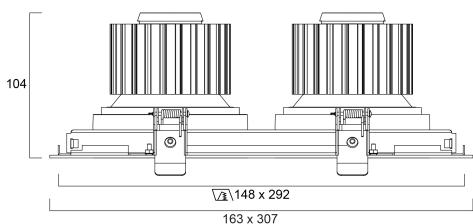

### Data table

#### GENERAL DATA

# Concord

## EXPOSPOT 90 DUO HE RA90 4000K NB WHITE 2070056

Product name	EXPOSPOT 90 DUO HE RA90 4000K NB WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	2 x 2789
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	50
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.92
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Remote
Drive current (mA)	700
Inrush Current (A)	38.8
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E

# Concord

## EXPOSPOT 90 DUO HE RA90 4000K NB WHITE 2070056

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

Max. products per 10A C Breaker	10
---------------------------------	----

Max. products per 20A B Breaker	13
---------------------------------	----

### LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B20	100000
------------------	--------

Lifespan L90 B10	54500
------------------	-------

### PHYSICAL DATA

Housing colour	White
----------------	-------

IP rating	IP20
-----------	------

IK rating	IK02
-----------	------

Nominal Product Length (mm)	307
-----------------------------	-----

Nominal Product Width (mm)	163
----------------------------	-----

Weight (kg)	2.1
-------------	-----

Recessed Depth (mm)	104
---------------------	-----

### PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5025768700561
--------------------	---------------

Packaging single width (cm)	30.0
-----------------------------	------

Packaging single depth (cm)	20.0
-----------------------------	------

DUN14 (outer)	05025768700561
---------------	----------------

Packaging outer length / height (cm)	50.0
--------------------------------------	------

### SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----