




Color: ■ white

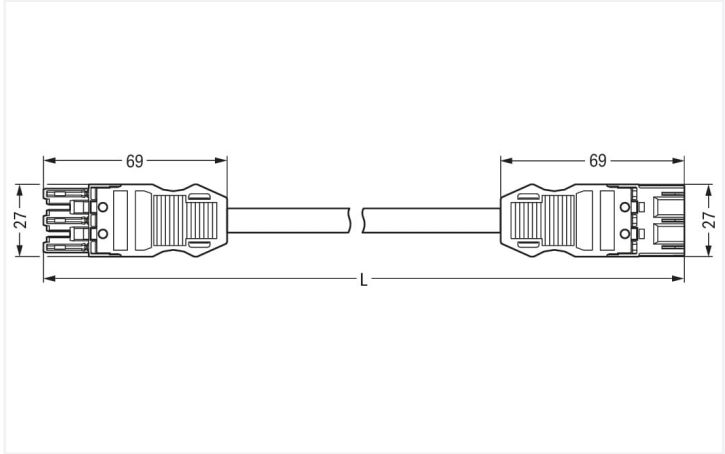

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

The WINSTA® MIDI cable assembly A coding supports rapid, correct installation. WAGO pluggable installation connectors are useful when criteria repeat or are distributed on a specified grid, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector offers protection against contact with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). The WINSTA® MIDI pluggable installation connector with A coding in white or black is normally used for general mains applications in power distribution. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Thanks to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The mandatory safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable assembly is provided with a socket and a plug. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also reduce installation costs without compromising safety and quality: with fire class E reduces the need for servicing and prevents unnecessary downtime.

- effective protection against mismating
- pre-assembled versions
- with A coding for use in a large number of general mains applications
- flexible installation to save space
- fast, secure installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category	III	III	II		approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2		approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	16 A	-	-			



Connection data			
Total number of potentials	3	Connection 1	
PE function	Preceding PE contact	Pole number	3
		Sheathed cable diameter	7.4 ... 9.4 mm
		Wire cross-section	1.5 mm²
		Connection type	Socket - Plug

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	27 mm / 1.063 inches
Height	12.9 mm / 0.508 inches
Total length	4 m

Mechanical data	
Use	General mains applications
Coding	A
Variable coding	Yes
Marking	L N
Potential marking	L N
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Connection type	Socket - Plug
Type of pre-assembled cable	Interconnecting cable
Cable type	H05VV-F 3G1.5
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection	
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data	
Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Insulation material (main housing)	Polyamide (PA66)
Fire class per EN 50575	E <sub>ca</sub>
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	119.45 MJ
Connector color	white
Strain relief color	white
Printing color of strain relief	black



Material data		
Sheathed cable color		white
Printing color of sheathed cable		black
Halogen-free		No
Silicon-free		Yes
Sheath material		PVC
Rubber cable		No
Weight		419.5 g
Copper weight of the pipe		0.043 kg/m

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data		
Product Group		20 (Winsta)
eCl@ss 10.0		27-44-06-04
eCl@ss 9.0		27-44-06-04
ETIM 8.0		EC002587
ETIM 7.0		EC002587
PU (SPU)		1 pcs
Packaging type		unpacked
Country of origin		DE
GTIN		4044918587235
Customs tariff number		85444290900

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7355
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance

771-9993/006-402

↓

Documentation

Bid Text

771-9993/006-402

19.02.2019

xml  
2.90 KB

↓

771-9993/006-402

04.12.2014

doc  
24.00 KB

↓

ausschreiben.de

771-9993/006-402

↓

CAD/CAE-Data

CAD data

2D/3D Models

771-9993/006-402

↓

CAE data

EPLAN Data Portal

771-9993/006-402

↓

WSCAD Universe

771-9993/006-402

↓

ZUKEN Portal

771-9993/006-402


↓

1 Compatible Products


1.1 Required Accessories

1.1.1 Locking system


1.1.1.1 Locking system




**Item No.: 770-101**  
Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**  
Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**  
Locking lever; for flying leads; for tool operation; white



1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white