

Features

- - Compact and high performance double bend 2-bend pin lamp, - Suitable for operation on electronic control gear (DE type) and magnetic ballast (D version), - Dimmable with suitable dimmer, - Excellent colour rendering, - Suitable for emergency lighting

Product Overview

Product name	Lynx-DE Superia 18W/840 G24Q-2 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	18
Lamp shape	Other
Cap/Base	G24q-2
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944121
E-number SE	8357377
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	18
Power consumption (W)	18
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288259260
Dimming method	Mains: leading / trailing edge

Lynx-DE Superia 18W/840 G24Q-2 SLV
0025926

Colour Code	840
Useful luminous flux (#use)	1215

Technical drawings



Data table

GENERAL DATA

Product name	Lynx-DE Superia 18W/840 G24Q-2 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	18
Lamp shape	Other
Cap/Base	G24q-2
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944121
E-number SE	8357377

OPTICAL DATA

Useful luminous flux (#use)	1215
-----------------------------	------

Lynx-DE Superia 18W/840 G24Q-2 SLV 0025926

Luminous flux (Rated) (lm)	1215
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	67
Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	84
Rated lumen maint. factor (%) at 8000 h 50Hz	81

ELECTRICAL DATA

Power consumption (W)	18
Wattage (W)	18
Starting time (max) (s)	10 Sec
Current (A)	0.22
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240.0
Control gear required	Yes
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	18

LIFETIME DATA

Average life (Nominal) (h)	12000
----------------------------	-------

Lynx-DE Superia 18W/840 G24Q-2 SLV 0025926

Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	70
Rated survival factor (%) at 16000 h 50Hz	71

PHYSICAL DATA

Nominal Product Length (mm)	146
Nominal Product Diameter (mm)	35
Max. Length base to base (mm) - A	147
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.062

PACKAGING


Product EAN number	5410288259260
Packaging single length / height (cm)	15.5
Packaging single width (cm)	3.6
Packaging single depth (cm)	3.6
DUN14 (inner)	15410288259267
Units per outer package	10
Packaging outer length / height (cm)	16.6
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	18.7

SAFETY DATA

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes

Energy label


**ENERG**
SYLVANIA
0025926

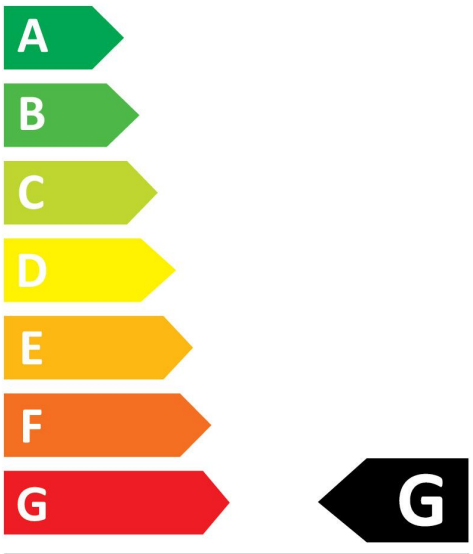

18
kWh/1000h



**ENERG**
SYLVANIA
0025926

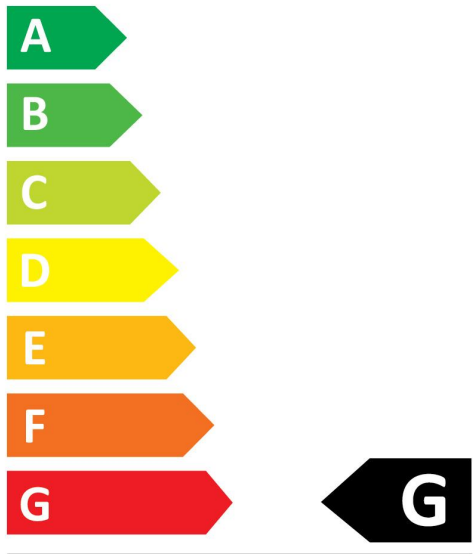

18
kWh/1000h

