


Data Sheet | Item Number: 894-8992/123-107

pre-assembled connecting cable; Dca; Socket/open-ended; 2-pole; Cod. F; Y-H(St)
Hh 1x2x0,8; 1 m; gray

<https://www.wago.com/894-8992/123-107>



Color: ■ gray

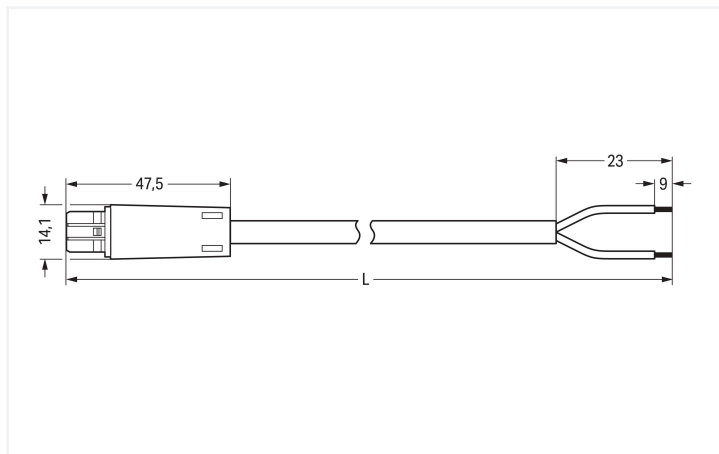

Dimensions in mm

Cable assembly WINSTA® KNX with strain relief

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® KNX cable assembly F coding, WAGO pluggable installation connectors are useful when criteria repeat or are distributed on a specified pattern, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). That results in the fact that users' fingers will never come into contact with electrified contact elements. The KNX standard is the ultimate benchmark in building automation. It ensures error-free, manufacturer-independent networking of state-of-the-art building systems. The grey WINSTA® KNX pluggable installation connectors in F coding support applications in the low-voltage range. According to the European CPR, the fire class of the cables used for construction is decisive for the safety of buildings as well. For houses with safety requirements, cable assemblies with fire class D are suitable. In the manufacturing of this cable assembly, we eliminated the use of halogen. This is an important contribution to climate protection.

Fast, secure pluggable connections – cable assemblies from WAGO

A socket and a free end are provided. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Now you can also lower installation costs without compromising safety and quality: with marking reduces the need for servicing and prevents unnecessary downtime.

- products perfectly tailored to your requirements guarantee safe use
- with F coding for connections with protection against mismatching for supplying power
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

Notes

Note

Cables with a different fire class can be found in the eShop.

Electrical data

Ratings per	IEC/EN 60664-1			General information	
Overvoltage category	III	III	II	Note on contact resistance	Approx. 3 mΩ contact resistance
Pollution degree	3	2	2		
Nominal voltage	50 V	-	-		
Rated impulse withstand voltage	0.8 kV	-	-		
Rated current	3 A	-	-		

Connection Data

Total number of potentials	2	Connection 1	
Conductor preparation	stripped	Conductor diameter	0.8 mm
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Strip length (outer insulation)	23 mm
		Connection type	Socket - free end

Physical data

Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	1 m

Mechanical data

Technology	KNX
Coding	F
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	J-Y(ST)Y...LG 1x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material (main housing)	Polyamide (PA66)
Fire class per EN 50575	D _{ca}
Contact material	Copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.15 MJ
Connector color	light gray
Strain relief color	black
Sheathed cable color	gray
Printing color of sheathed cable	black
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	39.7 g
Copper weight of the raw cable	0.01 kg/m

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143536578
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 10.0	EC002587
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product
Compliance
894-8992/123-107



Documentation

Bid Text

894-8992/123-107	19.02.2019	xml 3.00 KB	
894-8992/123-107	16.03.2015	doc 25.50 KB	